

ALD 125 VA



Short description

Sound-insulated outside air openings for decentralised domestic ventilation with manual shutter and stainless steel external grille, DN 125


Article number 0152.0068

Technical data

Air direction	Ventilation
Max. volumetric flow	30 m ³ /h
Installation site	Wall
Grille material	Synthetic (internal grille) / Stainless steel (external grille)
Housing material	Synthetic material
Colour	Pure white, similar to RAL 9010
Weight	1,18 kg
Weight including packaging	1,44 kg
Type of filter	Dust filter
Filter class	ISO Coarse 30 % (G2)
Type of shutter	manual, can be locked
Nominal size	125 mm
Width	159 mm
Height	159 mm
Depth	572 mm
Width with packaging	170 mm
Height with packaging	180 mm
Depth with packaging	590 mm
Ambient temperature	60 °C
Rated max. element normal difference in noise level $D_{n,w}$	47 dB
Packing unit	1 piece
Range	B
GTIN (EAN)	4012799520689


ALD 125 VA

Characteristic curve Pressure losses

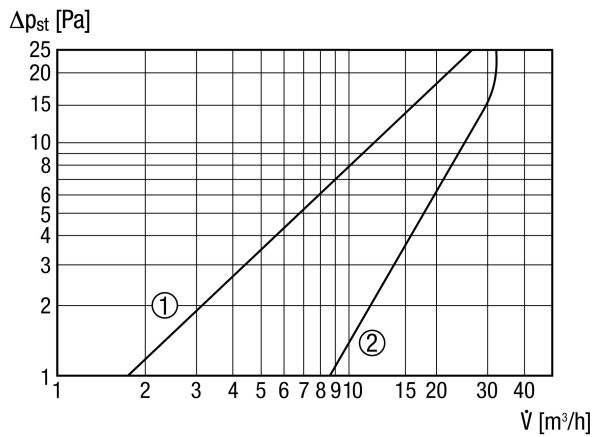

- ① ISO Coarse 45% dust filter (G3)
- ② ISO Coarse 30% dust filter (G2)

Dimensioned drawing [mm]

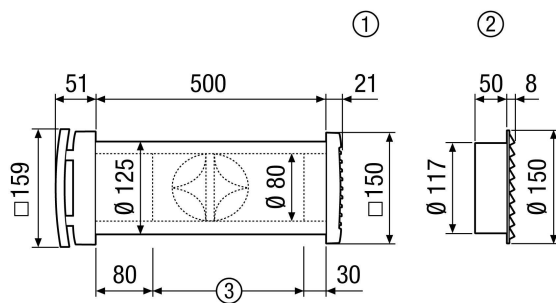

- ① ALD 125 square plastic external grille
- ② ALD 125 VA round stainless steel external grille
- ③ Shorten to wall thickness if necessary