

BK 25



Short description

Electric shutter with bimetal cap for ventilation channels, DN 250

Article number 0093.0901


Technical data

Loss of pressure	11 Pa
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Nominal output	25 W
I_{nom}	0,1 A
I_{max}	1,8 A
Starting current	1,8 A / 1 s
Degree of protection	IP 55
Drive	Bimetal
Installation	outside
Installation site	Wall
Installation position	vertical
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Lamella colour	Silver grey
Weight	1,41 kg
Weight including packaging	1,63 kg
Type of shutter	electrical
Suitable for nominal size	250 mm
Width	370 mm
Height	370 mm
Depth	50,5 mm
Width with packaging	385 mm
Height with packaging	385 mm
Depth with packaging	60 mm
Ambient temperature	40 °C
Packing unit	1 piece
Range	C

BK 25

GTIN (EAN)	4012799939016
------------	---------------

Dimensioned drawing [mm]

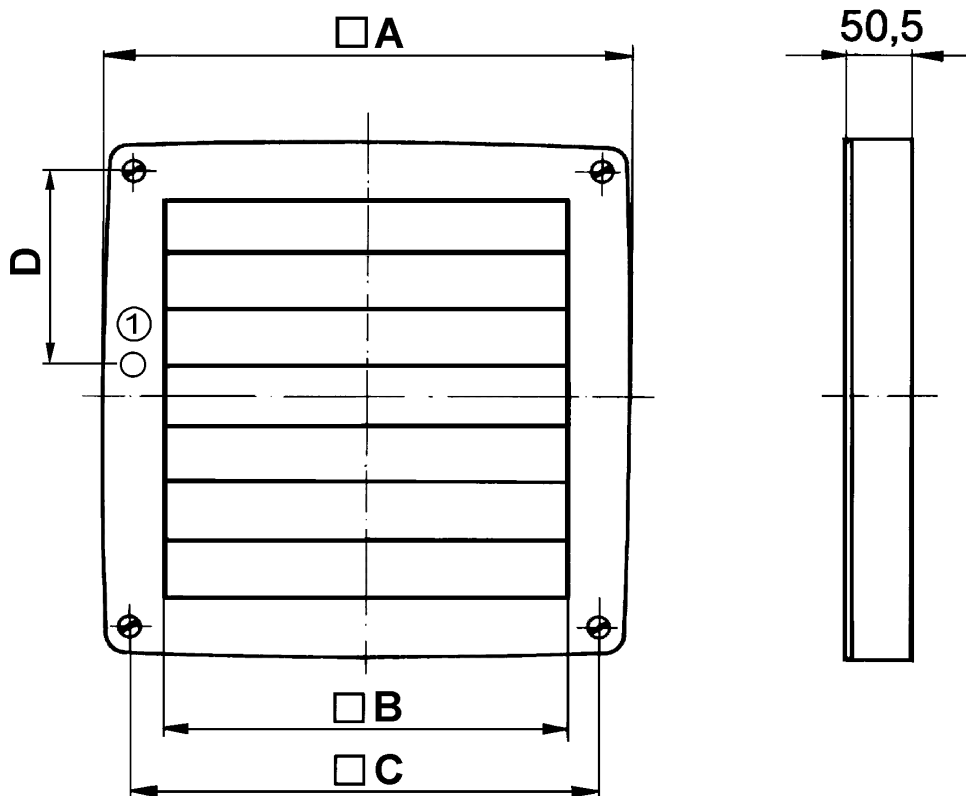

A	B	C	D
370	262	320	105,5

① Cable entry