

DAS 100/4



Short description

Axial fan, DN 1000, 3-phase current

Application examples

Production facility, Assembly hall, Storage facility, Industrial building, Workplace

Article number 0083.0862

Technical data

Model	Steel ring
Air flow volume	69.000 m ³ /h
Air volume _{nom}	19.500 m ³ /h (in opt. efficiency)
Pressure p _{fs, nom}	892 Pa (in opt. efficiency)
Rotating speed n _{nom}	1.480 1/min (in opt. efficiency)
Rotating speed	1.470 1/min
Impeller type	axial
Speed controllable	✓
Reversing capacity	–
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	7.718 W
I _{nom}	14,8 A (in opt. efficiency)
I _{max}	17,5 A
Degree of protection	IP 55
Insulation class	F
Installation site	Wall
Installation position	vertical
Material	Sheet steel, varnished
Housing material	Sheet steel, varnished
Colour	grey
Weight	132 kg
Weight including packaging	171 kg
Nominal size	1.000 mm
Width	1.250 mm
Height	1.250 mm
Depth	655 mm
Width with packaging	1.320 mm

DAS 100/4

Height with packaging	1.320 mm
Depth with packaging	930 mm
Airstream temperature at nominal current	50 °C
Airstream temperature at I_{Max}	-20 °C up to 50 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799838623

Technical data according to ErP in Best Efficiency Point (BEP)

Total efficiency η	63 %
Measurement category	C
Efficiency category	static
Efficiency level N	64
VSD necessary	No
Year of manufacture	see rating plate
Manufacturer's name / official registration number / manufacturer's place of establishment	Maico Elektroapparate-Fabrik GmbH / Freiburg registration court, HRB 601233 / Villingen-Schwenningen
Art. No.	0083.0862
P_{BEP} / Air volume $_{BEP}$ / $P_{fs, BEP}$	7,718 kW / 19.500 m ³ /h / 892 Pa
n_{BEP}	1.480 1/min
Specific ratio	≈ 1
Information about dismantling and disposal	see mounting instructions
Information about installation, operation and repairs	see mounting instructions
Objects used to measure efficiency which are not described by the measurement category	-
I_{BEP}	14,8 A
Sound power level $_{L_{WA7}}$	98 dB(A)


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
$L_{WA7, S5}$ (dB(A))	66	77	94	91	92	90	87	82	98

L_{WA7} = housing and free inlet sound power level in dB.

DAS 100/4

Characteristic curve

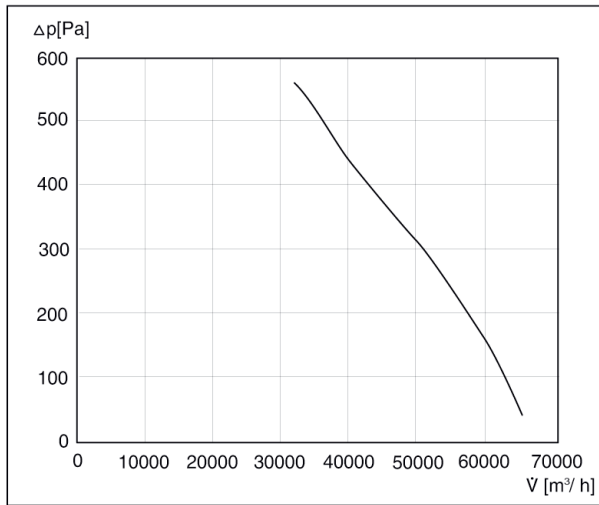

Dimensioned drawing [mm]

Number of holes: 20

