

DAS 125/8



Short description

Axial fan, DN 1250, 3-phase current

Application examples

Production facility, Assembly hall, Storage facility, Industrial building, Workplace

Article number 0083.0865

Technical data

Model	Steel ring
Air flow volume	56.000 m ³ /h
Air volume _{nom}	42.900 m ³ /h (in opt. efficiency)
Pressure p _{fs, nom}	215 Pa (in opt. efficiency)
Rotating speed n _{nom}	730 1/min (in opt. efficiency)
Rotating speed	730 1/min
Impeller type	axial
Speed controllable	✓
Reversing capacity	–
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	3.448 W (in opt. efficiency)
I _{nom}	6,9 A (in opt. efficiency)
I _{max}	8,9 A
Degree of protection	IP 55
Insulation class	F
Installation site	Wall
Installation position	vertical
Material	Sheet steel, varnished
Housing material	Sheet steel, varnished
Colour	grey
Weight	147 kg
Weight including packaging	241 kg
Nominal size	1.250 mm
Width	1.530 mm
Height	1.530 mm
Depth	655 mm
Width with packaging	1.560 mm

DAS 125/8

Height with packaging	1.560 mm
Depth with packaging	980 mm
Airstream temperature at nominal current	50 °C
Airstream temperature at I_{Max}	-20 °C up to 50 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799838654

Technical data according to ErP in Best Efficiency Point (BEP)

Total efficiency η	35,5 %
Measurement category	C
Efficiency category	static
Efficiency level N	38
VSD necessary	No
Year of manufacture	see rating plate
Manufacturer's name / official registration number / manufacturer's place of establishment	Maico Elektroapparate-Fabrik GmbH / Freiburg registration court, HRB 601233 / Villingen-Schwenningen
Art. No.	0083.0865
P_{BEP} / Air volume $_{BEP}$ / $P_{fs, BEP}$	3,448 kW / 42.900 m ³ /h / 215 Pa
n_{BEP}	730 1/min
Specific ratio	≈ 1
Information about dismantling and disposal	see mounting instructions
Information about installation, operation and repairs	see mounting instructions
Objects used to measure efficiency which are not described by the measurement category	-
I_{BEP}	6,9 A
Sound power level $_{L_{WA7}}$	88 dB(A)


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
$L_{WA7, S5}$ (dB(A))	59	77	79	84	85	84	81	76	88

L_{WA7} = housing and free inlet sound power level in dB.

DAS 125/8

Characteristic curve

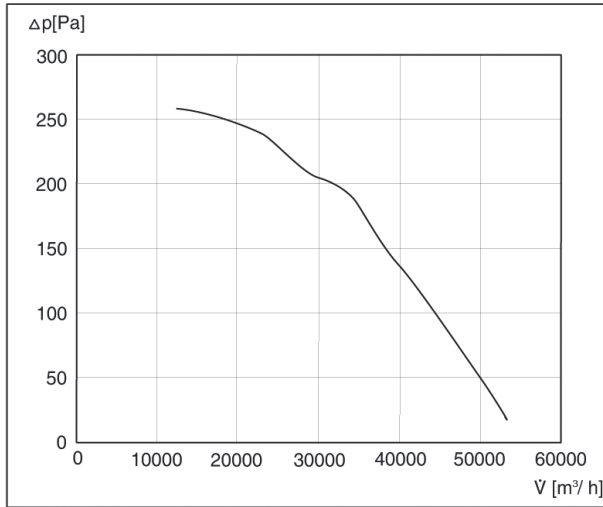

Dimensioned drawing [mm]

Number of holes: 20

