


DPK 22/4 Ex

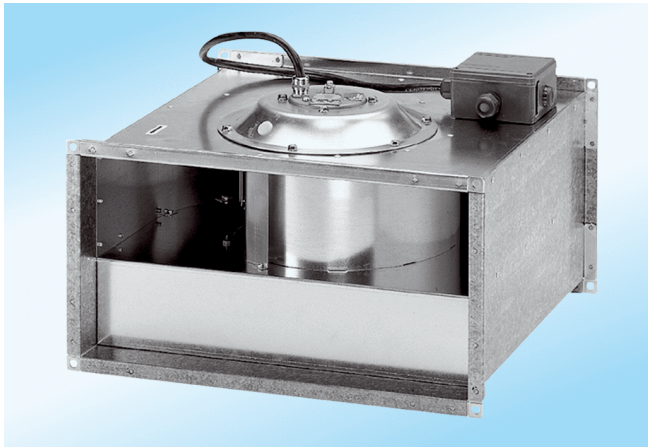

Short description

Centrifugal duct fan, three-phase AC, explosion proof

Application examples

Workplace air extraction system, Laboratory, Industrial building

Article number 0086.0640

Technical data

Air flow volume	1.900 m ³ /h
Rotating speed	1.300 1/min
Speed controllable	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Nominal output	570 W
I _{nom}	1,3 A
I _{max}	1,3 A
Degree of protection	IP 44
Mains cable	5 x 1,5 mm ²
Installation site	Channel
Installation position	horizontal
Housing material	Sheet steel, galvanised
Weight	20,1
Ambient temperature	40 °C
I _A /I _N	3,2
Certified as explosion proof	Ex-95.D.3276
Terminal box certified as explosion proof	Ex-95.D.3003U
Packing unit	1 piece
Range	D
GTIN (EAN)	4012799866404


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L _{WA2, high} (dB(A))	60	63	70	75	78	74	70	56	66
L _{WA4, high} (dB(A))	–	–	–	–	–	–	–	–	81


DPK 22/4 Ex

L_{WA2} = housing sound power level in dB.
LWA4

Characteristic curve

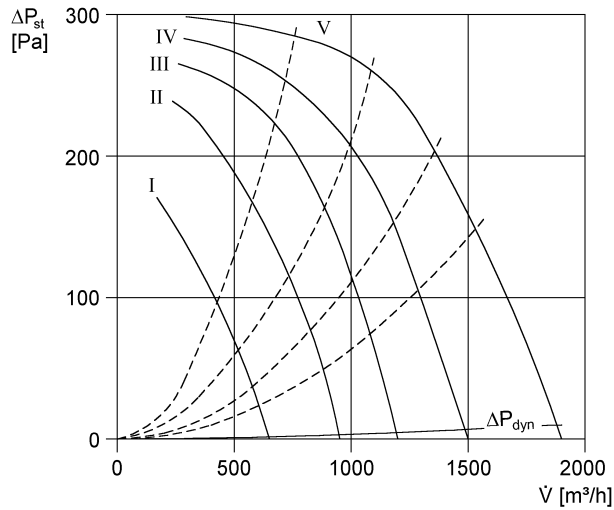

Dimensioned drawing [mm]

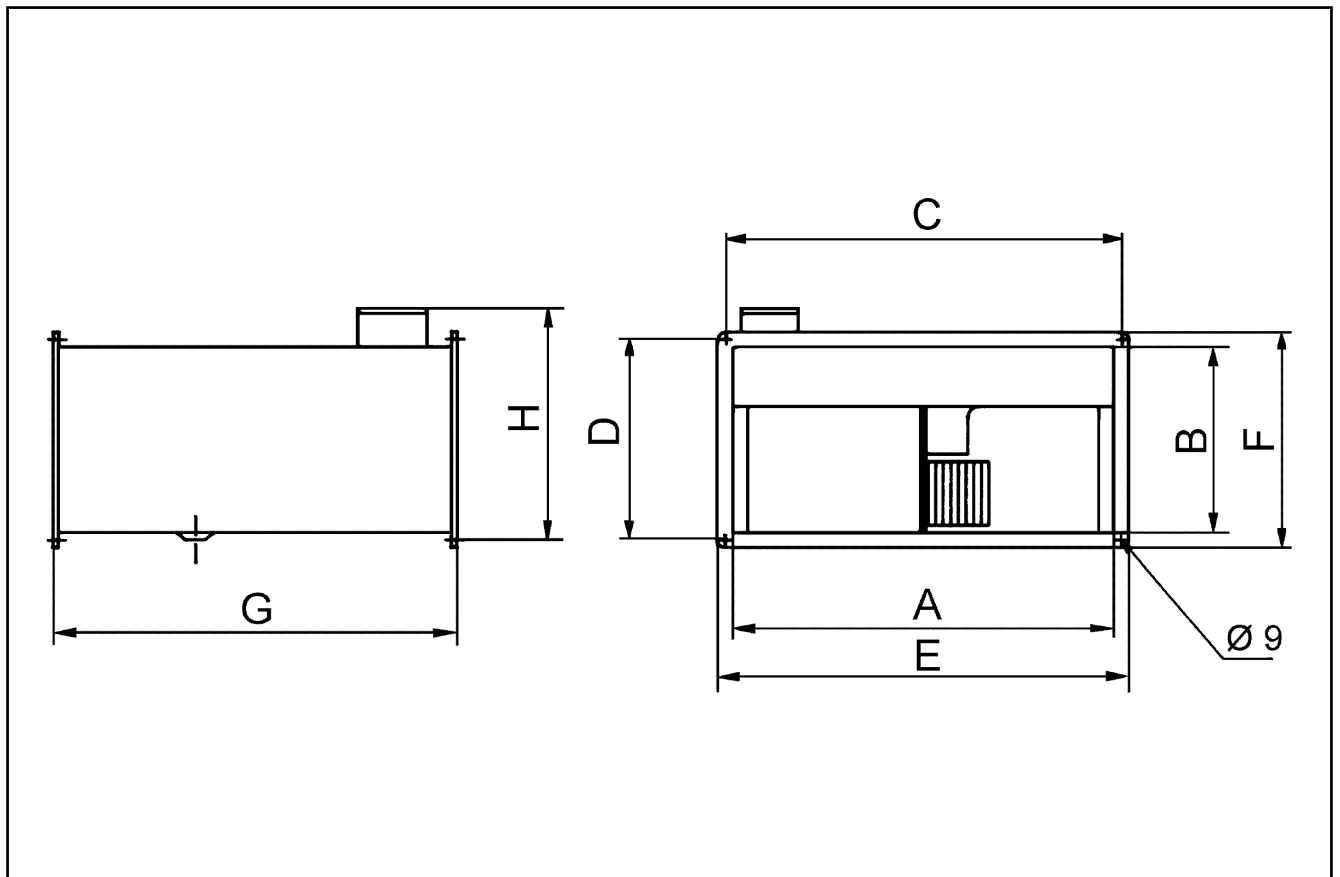



DPK 22/4 Ex

A	B	C	D	E	F	G	H
500	250	520	270	540	290	530	322