

DSK 31/1-S EC



Short description

Sound-insulated centrifugal channel fan, EC motor, three-phase AC, channel dimensions 600 mm x 350 mm, air volume 4,750 m³/h

Application examples

Commercial premises, Workplace, Showroom, Production facility, Industrial building

Article number 0086.0814

Technical data

Model	sound-insulated
Air flow volume	4.750 m ³ /h
Air volume _{nom}	2.887 m ³ /h (in opt. efficiency)
Pressure p _{fs, nom}	496 Pa (in opt. efficiency)
Rotating speed n _{nom}	1.700 1/min (in opt. efficiency)
Rotating speed	1.700 1/min
Speed controllable	✓
Rated voltage	380 V to 480 V
Frequency	50 Hz/60 Hz
Nominal output	760 W
I _{nom}	1,42 A
Degree of protection	IP 54
Insulation class	F
Installation site	Channel
Installation position	any
Housing material	Sheet steel, galvanised
Weight	50 kg
Weight including packaging	52 kg
Swivelling fan	✓
Channel dimension	600 mm x 350 mm
Width	680 mm
Height	390 mm
Depth	700 mm
Width with packaging	800 mm
Height with packaging	840 mm
Depth with packaging	701 mm
Airstream temperature	-25 °C up to 50 °C
Packing unit	1 piece
Range	E

DSK 31/1-S EC


GTIN (EAN)	4012799868149
------------	---------------

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA2, S5} (dB(A))	–	59	60	52	50	45	42	35	63
L_{WA5, S5} (dB(A))	–	63	65	59	61	62	58	50	70
L_{WA6, S5} (dB(A))	–	71	73	74	75	74	70	60	81

L_{WA2}= housing sound power level in dB.
 L_{WA5}= free inlet sound power level in dB.
 L_{WA6}= free outlet sound power level in dB.

Characteristic curve

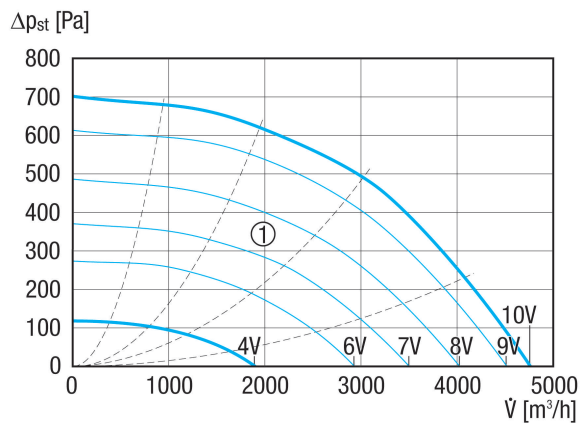

Auxiliary characteristics curves for control voltage 1 - 10 V

DSK 31/1-S EC

Dimensioned drawing [mm]

