

# DSK 35 EC



## Short description

Sound-insulated centrifugal channel fan, EC motor, three-phase AC, channel dimension 700 mm x 400 mm

## Application examples

Commercial premises, Workplace, Showroom, Production facility, Industrial building

Article number 0086.0807

## Technical data

Model	sound-insulated
Air flow volume	6.400 m <sup>3</sup> /h
Air volume <sub>nom</sub>	2.660 m <sup>3</sup> /h (in opt. efficiency)
Pressure p <sub>fs, nom</sub>	674 Pa (in opt. efficiency)
Rotating speed n <sub>nom</sub>	1.700 1/min (in opt. efficiency)
Rotating speed	1.700 1/min
Speed controllable	✓
Rated voltage	400 V
Frequency	50 Hz
Nominal output	1.260 W
I <sub>nom</sub>	2,2 A
Degree of protection	IP 54
Insulation class	F
Installation site	Channel
Installation position	any
Housing material	Sheet steel, galvanised
Weight	56,5 kg
Weight including packaging	56,99 kg
Swivelling fan	✓
Channel dimension	700 mm x 400 mm
Width	780 mm
Height	440 mm
Depth	780 mm
Width with packaging	785 mm
Height with packaging	522 mm
Depth with packaging	785 mm
Airstream temperature	-25 °C up to 50 °C
Packing unit	1 piece
Range	E

# DSK 35 EC


GTIN (EAN)	4012799868071
------------	---------------

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA2, S5</sub> (dB(A))</b>	–	60	63	59	56	52	47	40	67
<b>L<sub>WA5, S5</sub> (dB(A))</b>	–	60	65	71	67	66	60	52	74
<b>L<sub>WA6, S5</sub> (dB(A))</b>	–	69	75	77	79	76	71	61	84

L<sub>WA2</sub>= housing sound power level in dB.  
 L<sub>WA5</sub>= free inlet sound power level in dB.  
 L<sub>WA6</sub>= free outlet sound power level in dB.

## Characteristic curve

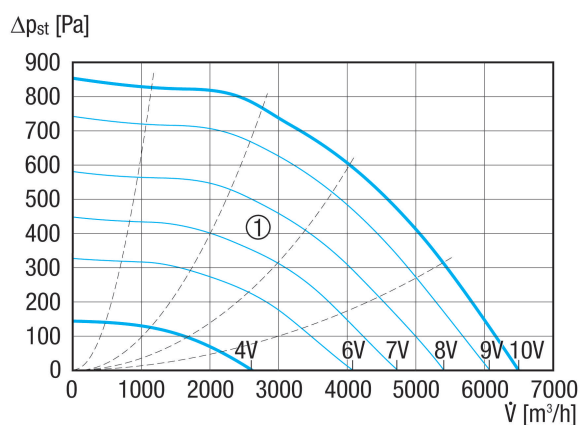

Auxiliary characteristics curves for control voltage 1 - 10 V

# DSK 35 EC

Dimensioned drawing [mm]

