

DSQ 25/4 K



Short description

Sound-insulated radial fan for high temperatures, three-phase AC, DN 250

Application examples

High temperatures of up to 180°C, Workplace air extraction system, Machine extraction unit, Workplace air extraction system, Machine extraction unit

Article number 0080.0074

Technical data

Air flow volume	1.200 m³/h
Speed controllable	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	90 W
P _{Max}	90 W
I _{nom}	0,4 A
I _{max}	0,4 A
Degree of protection	IP 55
Insulation class	F
Mains cable	5 x 1,5 mm²
Installation position	vertical / horizontal
Housing material	Sheet steel, galvanised
Weight	32 kg
Weight including packaging	35 kg
Swivelling fan	–
Nominal size	250 mm
Width	500 mm
Height	600 mm
Depth	555 mm
Width with packaging	715 mm
Height with packaging	780 mm
Depth with packaging	615 mm
Airstream temperature at nominal current	180 °C
Airstream temperature at I _{Max}	-10 °C up to 180 °C
Sound pressure level	37 dB(A) (Distance 3 m, Free-field conditions)
Packing unit	1 piece
Range	C

DSQ 25/4 K


GTIN (EAN)	4012799800743
------------	---------------

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA2}, high (dB(A))	–	46	43	38	38	33	35	28	49
L_{WA5}, high (dB(A))	–	53	53	55	56	53	52	44	62
L_{WA6}, high (dB(A))	–	49	54	60	58	56	60	48	65

L_{WA2}= housing sound power level in dB.
 L_{WA5}= free inlet sound power level in dB.
 L_{WA6}= free outlet sound power level in dB.

Characteristic curve

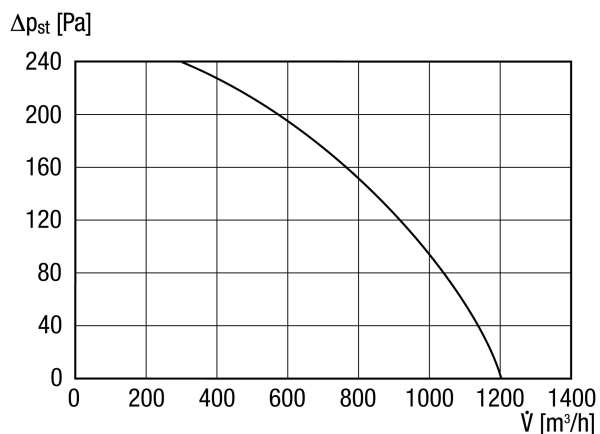

DSQ 25/4 K

Dimensioned drawing [mm]

