

# DSR 40 S



## Short description

Sound-insulated ventilation box with swivelling fan, DN 400, three-phase AC

Article number 0080.0233

## Technical data

Air flow volume	3.120 m <sup>3</sup> /h
Rotating speed	1.355 1/min
Speed controllable	–
Type of voltage	Three-phase AC
Rated voltage	400 V
Nominal output	470 W
I <sub>nom</sub>	1,18 A
I <sub>max</sub>	1,3 A
Mains cable	5 x 1,5 mm <sup>2</sup>
Weight	46
Swivelling fan	–
Nominal size	400 mm
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799802334

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA5</sub>, S5 (dB(A))</b>	–	60	64	53	54	54	49	42	66
<b>L<sub>WA6</sub>, S5 (dB(A))</b>	–	64	70	70	69	66	59	53	76
<b>L<sub>WA2</sub>, S5 (dB(A))</b>	–	54	57	45	40	37	36	31	59


L<sub>WA2</sub>= housing sound power level in dB.

L<sub>WA5</sub>= free inlet sound power level in dB.

L<sub>WA6</sub>= free outlet sound power level in dB.

# DSR 40 S

## Characteristic curve

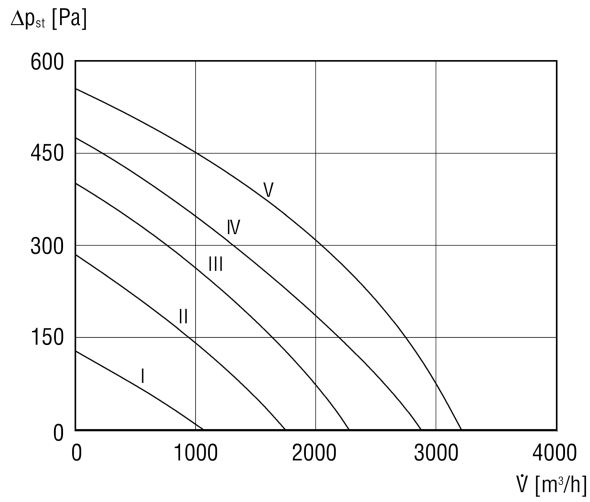

## Dimensioned drawing [mm]

