

DZD 35/6 B Ex t



Short description

Axial roof fan, horizontal air outlet, DN355, three-phase AC, explosion-proof, medium: dust

Article number 0087.0815

Technical data

Air flow volume	1.370 m ³ /h
Rotating speed	965 1/min
Air direction	Ventilation and air extraction
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	40 W
cosφ	0,42
I _{nom}	0,13 A
I _{max} at U _{Nominal}	0,13 A
Degree of protection	IP 64
Insulation class	F
Material	Sheet steel, galvanised
Colour	galvanised
Weight	22,7 kg
Weight including packaging	27,32 kg
Nominal size	355 mm
Width	720 mm
Height	380 mm
Depth	720 mm
Width with packaging	790 mm
Height with packaging	435 mm
Depth with packaging	790 mm
EX designation in accordance with the ATEX Directive	Ex II 2 D
EX designation in accordance with standard	Ex tb IIIB T135°C Db IP64 X / Ex h IIIB T135°C Db X
Ta ambient temperature	-20 °C ≤ Ta ≤ +40 °C
I _A /I _N	3,2

DZD 35/6 B Ex t


Time t_A	1390 sek
Operating mode	S1
PTC DIN 44082	M 80
EC type examination certificate	TÜV-A 19 ATEX0104 X, IECEx EPS 19.0020X
Temperature class	T135°C
Temperature class of insulating materials Th. Cl.	155 (F)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799878155

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA5, high} (dB(A))	–	–	–	–	–	–	–	–	69

L_{WA5}= free inlet sound power level in dB.

Characteristic curve

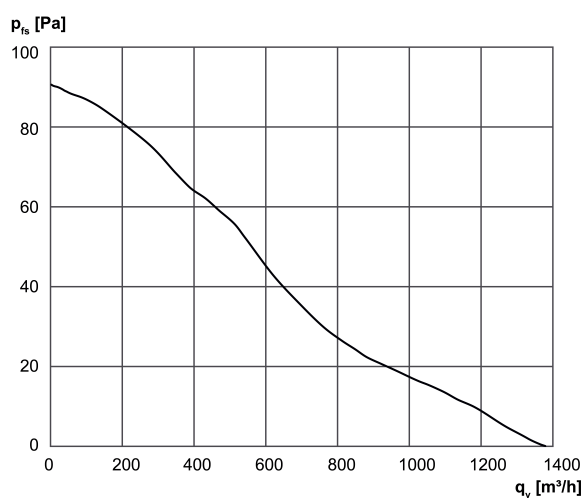

DZD 35/6 B Ex t

Dimensioned drawing [mm]

