

DZD 40/4 B Ex t



Short description

Axial roof fan, horizontal air outlet, DN400, three-phase AC, explosion-proof, medium: dust

Article number 0087.0819

Technical data

Air flow volume	3.200 m ³ /h
Rotating speed	1.465 1/min
Air direction	Ventilation and air extraction
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	170 W
cosφ	0,45
I _{nom}	0,55 A
I _{max} at U _{Nominal}	0,7 A
Degree of protection	IP 64
Insulation class	F
Material	Sheet steel, galvanised
Colour	galvanised
Weight	26,6 kg
Weight including packaging	32 kg
Nominal size	400 mm
Width	830 mm
Height	415 mm
Depth	830 mm
Width with packaging	865 mm
Height with packaging	460 mm
Depth with packaging	865 mm
EX designation in accordance with the ATEX Directive	Ex II 2 D
EX designation in accordance with standard	Ex tb IIIB T135°C Db IP64 X / Ex h IIIB T135°C Db X
Ta ambient temperature	-20 °C ≤ Ta ≤ +40 °C
I _A /I _N	5,7

DZD 40/4 B Ex t


Time t_A	110 sek
Operating mode	S1
PTC DIN 44082	M 100
EC type examination certificate	TÜV-A 19 ATEX0104 X, IECEx EPS 19.0020X
Temperature class	T135°C
Temperature class of insulating materials Th. Cl.	155 (F)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799878193

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA5, high} (dB(A))	–	–	–	–	–	–	–	–	84

L_{WA5}= free inlet sound power level in dB.

Characteristic curve

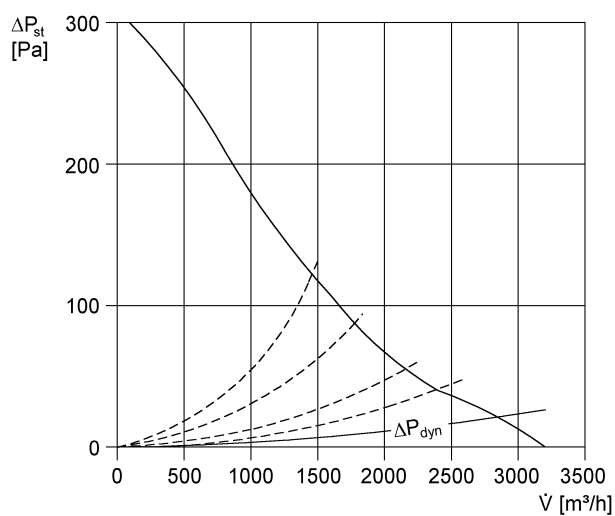

DZD 40/4 B Ex t

Dimensioned drawing [mm]

