

DZQ 25/4 B Ex t



Short description

Axial wall-mounted fan with square wall plate, DN250, three-phase AC, explosion-proof, medium: dust

Article number 0083.0202

Technical data

| | |
|--|---|
| Model | Square wall plate |
| Air flow volume | 950 m ³ /h |
| Rotating speed | 1.475 1/min |
| Speed controllable | ✓ |
| Reversing capacity | ✓ |
| Type of voltage | Three-phase AC |
| Rated voltage | 400 V |
| Frequency | 50 Hz |
| Nominal output | 38 W |
| cosφ | 0,28 |
| I _{nom} | 0,19 A |
| I _{max} at U _{Nominal} | 0,19 A |
| Degree of protection | IP 64 |
| Insulation class | F |
| Type of installation | Surface-mounted |
| Material | Sheet steel, galvanised |
| Colour | galvanised |
| Weight | 7,6 kg |
| Weight including packaging | 8,75 kg |
| Nominal size | 250 mm |
| Width | 400 mm |
| Height | 400 mm |
| Depth | 222,5 mm |
| Width with packaging | 415 mm |
| Height with packaging | 415 mm |
| Depth with packaging | 300 mm |
| EX designation in accordance with the ATEX Directive | Ex II 2 D |
| EX designation in accordance with standard | Ex tb IIIB T135°C Db IP64 X / Ex h IIIB T135°C Db X |
| Ta ambient temperature | -20 °C ≤ Ta ≤ +60 °C |

DZQ 25/4 B Ex t


| | |
|---|---|
| I _A /I _N | 3,7 |
| Time t _A | 450 sek |
| Operating mode | S1 |
| PTC DIN 44082 | M 100 |
| EC type examination certificate | TÜV-A 19 ATEX0102 X, IECEx EPS 19.0018X |
| Temperature class | T200°C |
| Temperature class of insulating materials Th. Cl. | 155 (F) |
| Packing unit | 1 piece |
| Range | C |
| GTIN (EAN) | 4012799832027 |

Sound power level in octave range

| | 63 Hz | 125 Hz | 250 Hz | 500 Hz | 1 kHz | 2 kHz | 4 kHz | 8 kHz | Total |
|-----------------------------------|-------|--------|--------|--------|-------|-------|-------|-------|-------|
| L _{WA7, high} (dB(A)) | - | - | - | - | - | - | - | - | 65 |

L_{WA7}= housing and free inlet sound power level in dB.

Characteristic curve

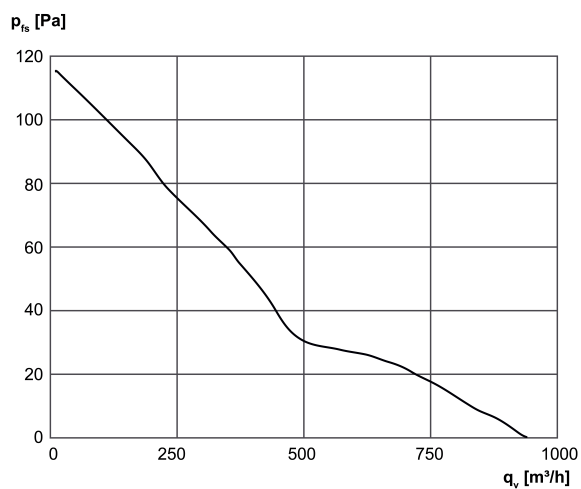

DZQ 25/4 B Ex t

Dimensioned drawing [mm]

- ① Steel wall plate = EZQ/DZQ model
- ② Steel wall ring = EZS/DZS model

