

DZQ 60/4 B



Short description

Axial wall fan with square wall plate, DN 600, three-phase AC

Application examples

Production facility, Commercial premises, Garage, Building container, Storage facility

Article number 0083.0134

Technical data

Model	Square wall plate
Air flow volume	14.560 m ³ /h
Air volume _{nom}	10.800 m ³ /h (in opt. efficiency)
Pressure p _{fs, nom}	175 Pa (in opt. efficiency)
Rotating speed n _{nom}	1.370 1/min (in opt. efficiency)
Rotating speed	1.417 1/min
Impeller type	axial
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	1.385 W (in opt. efficiency)
I _{nom}	2,2 A (in opt. efficiency)
I _{max}	3,5 A
Degree of protection	IP 55
Insulation class	F
Pole-changeable	–
Mains cable	7 x 1,5 mm ²
Installation site	Wall / Ceiling
Type of installation	Surface-mounted
Installation position	horizontal / vertical
Material	Sheet steel, galvanised
Colour	Silver
Weight	33,32 kg
Weight including packaging	38,88 kg
Nominal size	600 mm
Width	820 mm
Height	820 mm

DZQ 60/4 B

Depth	401 mm
Width with packaging	850 mm
Height with packaging	850 mm
Depth with packaging	435 mm
Airstream temperature at nominal current	-20 °C up to 60 °C
Airstream temperature at I_{Max}	-20 °C up to 60 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799831341

Technical data according to ErP in Best Efficiency Point (BEP)

Total efficiency η	37,9 %
Measurement category	A
Efficiency category	static
Efficiency level N	43,3
VSD necessary	No
Year of manufacture	see rating plate
Manufacturer's name / official registration number / manufacturer's place of establishment	Maico Elektroapparate-Fabrik GmbH / Freiburg registration court, HRB 601233 / Villingen-Schwenningen
Art. No.	0083.0134
P_{BEP} / Air volume $_{BEP}$ / $P_{fs, BEP}$	1,385 kW / 10.800 m ³ /h / 175 Pa
η_{BEP}	1.370 1/min
Specific ratio	≈ 1
Information about dismantling and disposal	see mounting instructions
Information about installation, operation and repairs	see mounting instructions
Objects used to measure efficiency which are not described by the measurement category	-
Sound power level L_{WA7}	86 dB(A)

Sound power level in octave range


	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
$L_{WA7, S1}$ (dB(A))	-	-	-	-	-	-	-	-	62
$L_{WA7, S2}$ (dB(A))	-	-	-	-	-	-	-	-	73
$L_{WA7, S3}$ (dB(A))	-	-	-	-	-	-	-	-	79
$L_{WA7, S4}$ (dB(A))	-	-	-	-	-	-	-	-	83
$L_{WA7, S5}$ (dB(A))	43	58	74	79	83	81	76	67	86

DZQ 60/4 B

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA8, S1} (dB(A))	-	-	-	-	-	-	-	-	73
L_{WA8, S2} (dB(A))	-	-	-	-	-	-	-	-	78
L_{WA8, S3} (dB(A))	-	-	-	-	-	-	-	-	81
L_{WA8, S4} (dB(A))	-	-	-	-	-	-	-	-	86
L_{WA8, S5} (dB(A))	60	69	76	79	83	82	81	78	88


L_{WA7}= housing and free inlet sound power level in dB.
 L_{WA8}= housing and free outlet sound power level in dB.

Characteristic curve

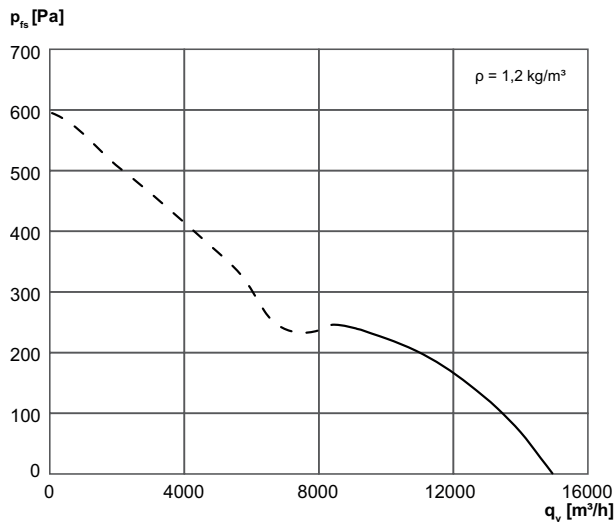

Dimensioned drawing [mm]

- ① Steel wall plate = EZQ/DZQ model
- ② Steel wall ring = EZS/DZS model

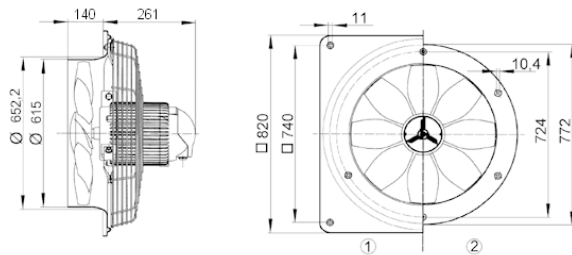

DZQ 60/4 B

