

# DZS 30/2 B Ex t



## Short description

Axial wall-mounted fan with steel wall ring, DN300, three-phase AC, explosion-proof, medium: dust

Article number 0094.0207

## Technical data

Model	Steel wall ring
Air flow volume	3.380 m <sup>3</sup> /h
Rotating speed	2.910 1/min
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	240 W
cosφ	0,73
I <sub>nom</sub>	0,46 A
I <sub>max</sub>	1 A
I <sub>max</sub> at U <sub>Nominal</sub>	0,85 A
Degree of protection	IP 64
Insulation class	F
Type of installation	Surface-mounted
Material	Sheet steel, galvanised
Colour	galvanised
Weight	10,5 kg
Weight including packaging	12,33 kg
Nominal size	300 mm
Width	465 mm
Height	465 mm
Depth	278 mm
Width with packaging	480 mm
Height with packaging	480 mm
Depth with packaging	325 mm
EX designation in accordance with the ATEX Directive	Ex II 2 D
EX designation in accordance with standard	Ex tb IIIB T200°C Db IP64 X / Ex h IIIB T200°C Db X

# DZS 30/2 B Ex t


Ta ambient temperature	-20 °C ≤ Ta ≤ +60 °C
I <sub>A</sub> /I <sub>N</sub>	8,5
Time t <sub>A</sub>	85 sek
Operating mode	S1
PTC DIN 44082	M 100
EC type examination certificate	TÜV-A 19 ATEX0102 X, IECEx EPS 19.0018X
Temperature class	T200°C
Temperature class of insulating materials Th. Cl.	155 (F)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799942078

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L <sub>WA7, high</sub> (dB(A))	-	-	-	-	-	-	-	-	86

L<sub>WA7</sub>= housing and free inlet sound power level in dB.

## Characteristic curve

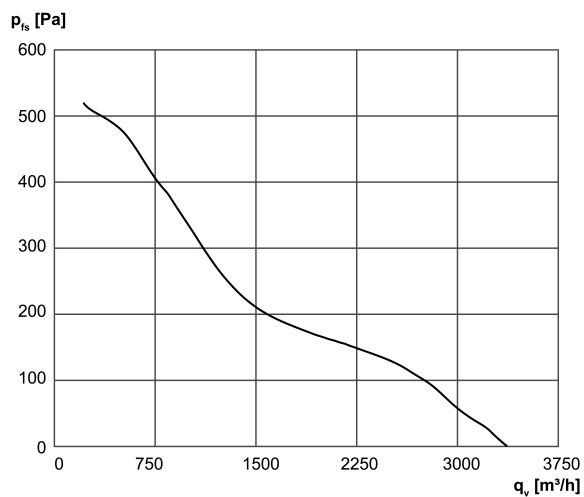

# DZS 30/2 B Ex t

Dimensioned drawing [mm]

- ① Steel wall plate = EZQ/DZQ model
- ② Steel wall ring = EZS/DZS model

