

DZS 60/6 B Ex t



Short description

Axial wall-mounted fan with steel wall ring, DN600, three-phase AC, explosion-proof, medium: dust

Article number 0094.0215

Technical data

Model	Steel wall ring
Air flow volume	9.450 m ³ /h
Rotating speed	960 1/min
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	295 W
cosφ	0,65
I _{nom}	0,66 A
I _{max} at U _{Nominal}	1,32 A
Degree of protection	IP 64
Insulation class	F
Type of installation	Surface-mounted
Material	Sheet steel, galvanised
Colour	galvanised
Weight	29,4 kg
Weight including packaging	30,2 kg
Nominal size	600 mm
Width	820 mm
Height	820 mm
Depth	315,5 mm
Width with packaging	850 mm
Height with packaging	850 mm
Depth with packaging	430 mm
EX designation in accordance with the ATEX Directive	Ex II 2 D
EX designation in accordance with standard	Ex tb IIIB T200°C Db IP64 X / Ex h IIIB T200°C Db X
Ta ambient temperature	-20 °C ≤ Ta ≤ +60 °C

DZS 60/6 B Ex t


I _A /I _N	4,5
Time t _A	290 sek
Operating mode	S1
PTC DIN 44082	M 130
EC type examination certificate	TÜV-A 19 ATEX0102 X, IECEx EPS 19.0018X
Temperature class	T200°C
Temperature class of insulating materials Th. Cl.	155 (F)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799942153

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L _{WA7, high} (dB(A))	-	-	-	-	-	-	-	-	78

L_{WA7}= housing and free inlet sound power level in dB.

Characteristic curve

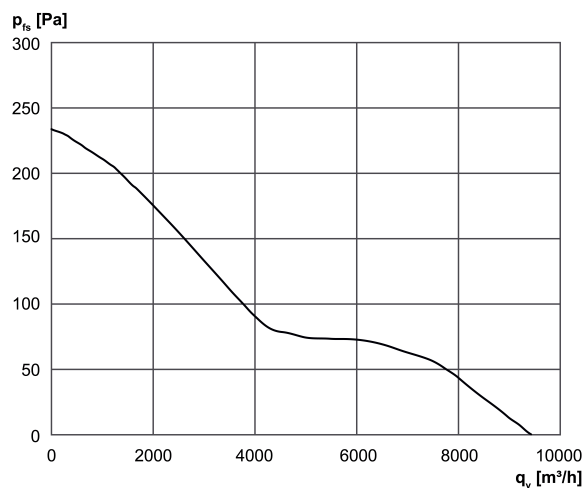

DZS 60/6 B Ex t

Dimensioned drawing [mm]

- ① Steel wall plate = EZQ/DZQ model
- ② Steel wall ring = EZS/DZS model

