

ECA 100 ipro KVZC



Short description

Two-step small room fan with electrical internal shutter, adjustable start delay and overrun time, DN 100

Application examples

Bathroom, WC, Storage room, Larder, Cellar

Article number 0084.0206


Technical data

Model	Adjustable start delay and overrun time
Air flow volume	78 m ³ /h / 92 m ³ /h
Rotating speed	2.100 1/min / 2.500 1/min
Speed controllable	–
Reversing capacity	–
SEC average	-7,8 kWh/(m ² *a)
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	10 W / 13 W
I _{max}	0,08 A
Degree of protection	IP X5
Mains cable	5 x 1,5 mm ²
Installation site	Ceiling / Wall
Type of installation	Surface-mounted
Installation position	any
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	0,73 kg
Weight including packaging	0,88 kg
Shutter	integrated
Type of shutter	electrical
Nominal size	100 mm
Width	159 mm
Height	159 mm
Depth	130 mm
Width with packaging	165 mm
Height with packaging	165 mm
Depth with packaging	145 mm

ECA 100 ipro KVZC

Airstream temperature at I_{Max}	40 °C
Overrun time	0 min / 8 min / 17 min / 25 min
Start delay	0 s / 50 s / 90 s / 120 s
Sound pressure level	27 dB(A) / 32 dB(A) (Distance 3 m, Free-field conditions)
Packing unit	1 piece
Range	A
GTIN (EAN)	4012799842064


Characteristic curve

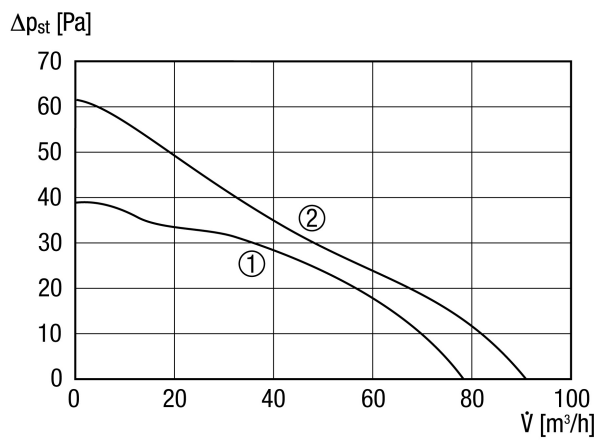

- ① Performance level 1
- ② Performance level 2

ECA 100 ipro KVZC

Dimensioned drawing [mm]

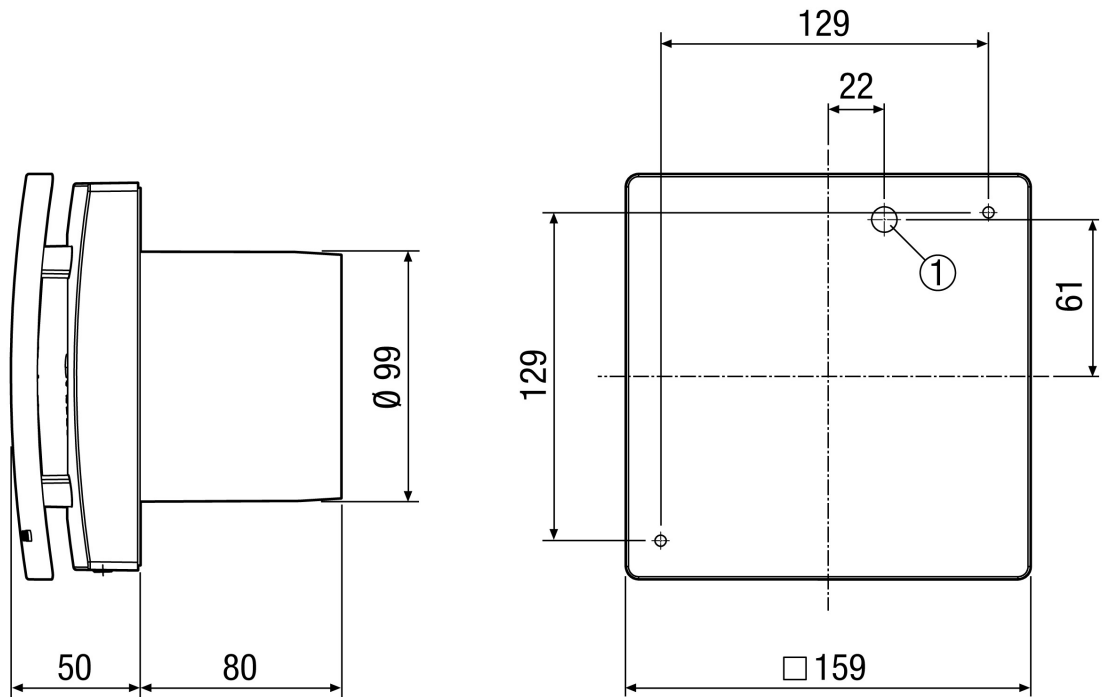

① Cable entry