

ECA 120 VZ



Short description

With fixed internal grille and time delay switch

Application examples

Bathroom, WC, Storage room, Larder, Cellar

Article number 0084.0007


Technical data

Model	Time delay switch
Air flow volume	170 m ³ /h
Rotating speed	2.600 1/min
Speed controllable	–
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Power consumption	19 W
I _{max}	0,14 A
Degree of protection	IP 45
Mains cable	5 x 1,5 mm ²
Installation site	Wall
Type of installation	Surface-mounted
Installation position	any
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	0,9 kg
Weight including packaging	1,06 kg
Nominal size	120 mm
Width	171 mm
Height	171 mm
Depth	114 mm
Width with packaging	180 mm
Height with packaging	180 mm
Depth with packaging	140 mm
Airstream temperature at I _{Max}	40 °C
Overrun time	6 min
Start delay	50 s

ECA 120 VZ

Sound pressure level	42 dB(A) (Distance 3 m, Free-field conditions)
Packing unit	1 piece
Range	A
GTIN (EAN)	4012799840077


Characteristic curve

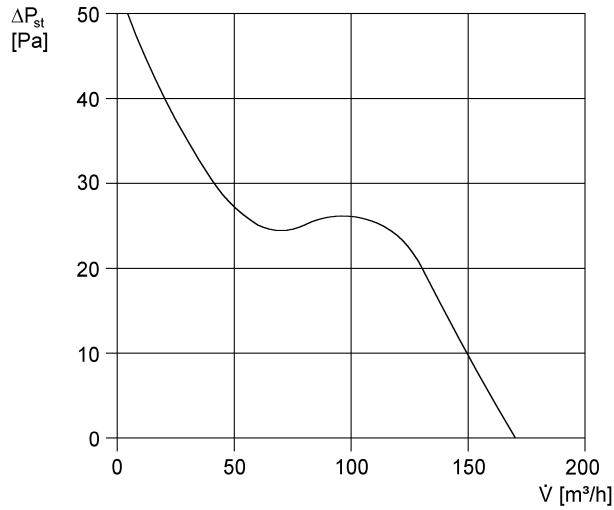

V = 230 or 24 V
 f = 50 Hz
 n = 2600 min⁻¹

ECA 120 VZ

Dimensioned drawing [mm]

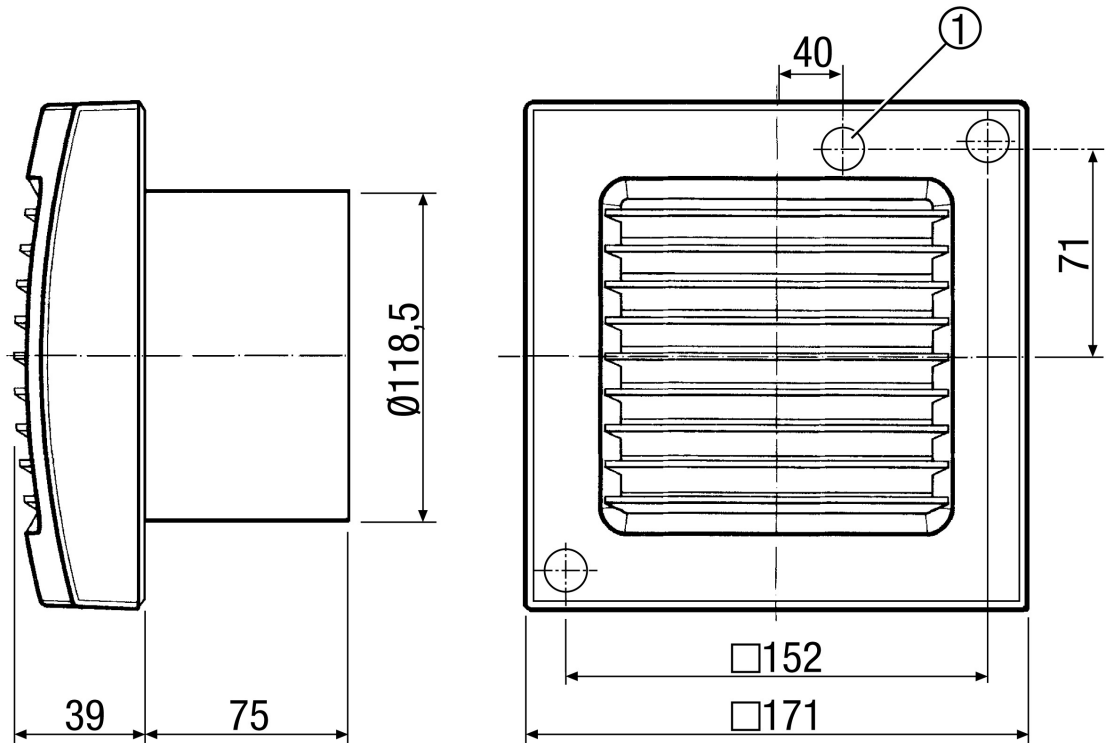

① Cable entry