

# ECA 150 ipro K



## Short description

Two-level small room fan, DN 150 with electrical internal shutter

## Application examples

Kitchen, Utility room, Cellar, Hobby room, Sauna vestibule

Article number 0084.0091


## Technical data

|                            |   |
|----------------------------|---|
| Model                      | Standard model                                |
| Air flow volume            | 200 m <sup>3</sup> /h / 250 m <sup>3</sup> /h |
| Rotating speed             | 1.672 1/min / 2.189 1/min                     |
| Speed controllable         | ✓   |
| Reversing capacity         | –   |
| SEC average                | -10,49 kWh/(m <sup>2</sup> *a)                |
| Type of voltage            | Alternating current                           |
| Rated voltage              | 230 V   |
| Frequency                  | 50 Hz   |
| Nominal output             | 18 W / 22 W                                   |
| I <sub>max</sub>           | 0,11 A  |
| Degree of protection       | IP X5   |
| Mains cable                | 3/5 x 1.5 mm <sup>2</sup>                     |
| Installation site          | Ceiling / Wall                                |
| Type of installation       | Surface-mounted                               |
| Installation position      | any   |
| Material                   | Synthetic material                            |
| Colour                     | Traffic white, similar to RAL 9016            |
| Weight                     | 1,7 kg  |
| Weight including packaging | 1,96 kg                                       |
| Shutter                    | integrated                                    |
| Type of shutter            | electrical                                    |
| Nominal size               | 150 mm  |
| Width                      | 228 mm  |
| Height                     | 228 mm  |
| Depth                      | 123,3 mm                                      |
| Width with packaging       | 235 mm  |
| Height with packaging      | 235 mm  |
| Depth with packaging       | 200 mm  |

# ECA 150 ipro K


|   |   |
|---|---|
| Airstream temperature at I <sub>Max</sub> | 40 °C   |
| Sound pressure level                      | 33 dB(A) / 40 dB(A) (Distance 3 m, Free-field conditions) |
| Packing unit                              | 1 piece   |
| Range                                     | A   |
| GTIN (EAN)                                | 4012799840916   |

## Characteristic curve

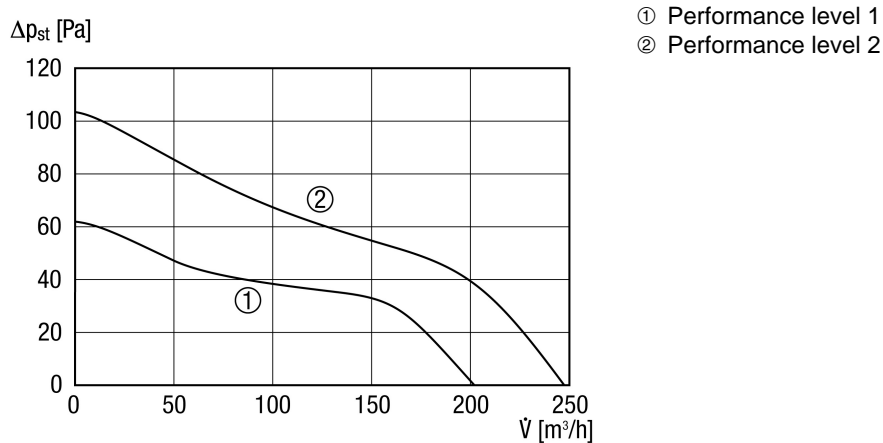

# ECA 150 ipro K

Dimensioned drawing [mm]

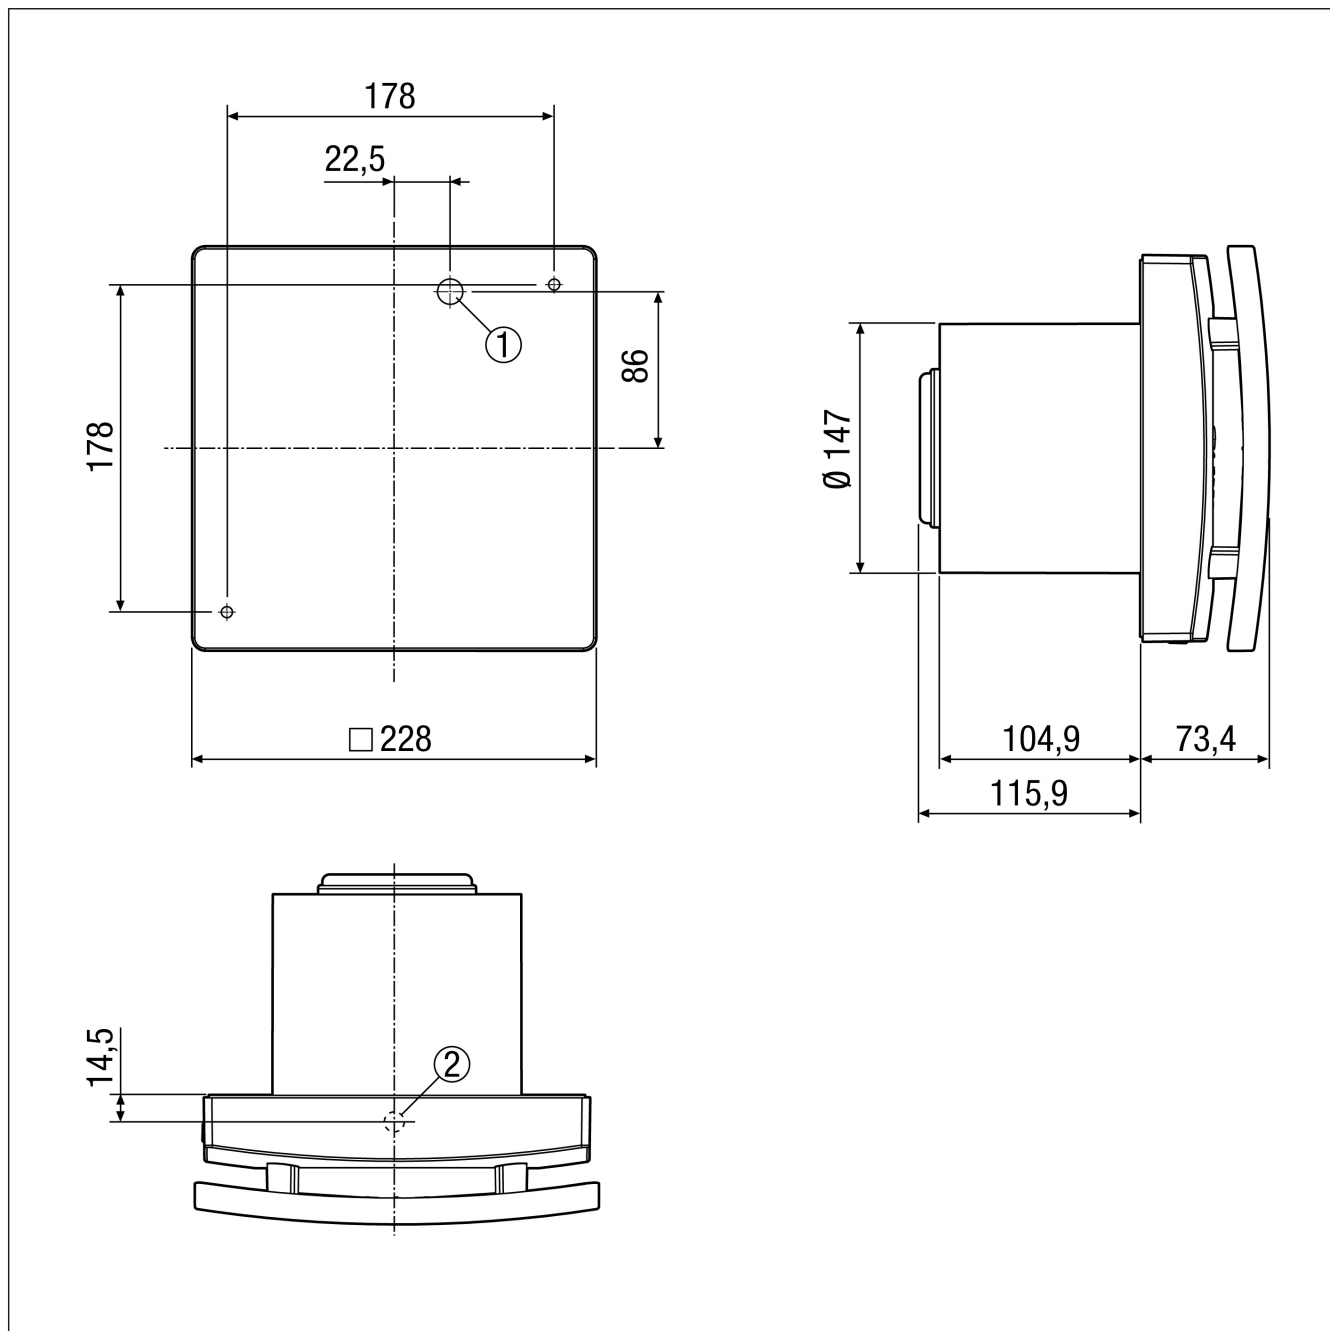

- ① Cable entry for recessed-mounted connection
- ② Cable bushing for surface-mounted connection