

ECA 150 ipro RC



Short description

Two-level small room fan, DN 150, with radio receiver, master-slave operation only possible in single-type system, i.e. only with ECA 150 ipro ...RC... units!

Application examples

Multiple family unit, Single-family house, Flat occupying the whole of one floor, Commercial premises, Office

Article number 0084.0087


Technical data

| | |
|---|---|
| Model | Radio receiver |
| Air flow volume | 200 m ³ /h / 250 m ³ /h |
| Rotating speed | 1.672 1/min / 2.189 1/min |
| Speed controllable | – |
| Reversing capacity | – |
| SEC average | -11,18 kWh/(m ² *a) |
| Type of voltage | Alternating current |
| Rated voltage | 230 V |
| Frequency | 50 Hz |
| Nominal output | 15 W / 19 W |
| I _{max} | 0,09 A |
| Degree of protection | IP X5 |
| Mains cable | 3 x 1,5 mm ² |
| Installation site | Ceiling / Wall |
| Type of installation | Surface-mounted |
| Installation position | any |
| Material | Synthetic material |
| Colour | Traffic white, similar to RAL 9016 |
| Weight | 1,61 kg |
| Weight including packaging | 1,88 kg |
| Shutter | none |
| Nominal size | 150 mm |
| Width | 228 mm |
| Height | 228 mm |
| Depth | 189,3 mm |
| Width with packaging | 235 mm |
| Height with packaging | 235 mm |
| Depth with packaging | 200 mm |
| Airstream temperature at I _{Max} | 40 °C |

ECA 150 ipro RC

| | |
|----------------------|---|
| Sound pressure level | 33 dB(A) / 40 dB(A) (Distance 3 m, Free-field conditions) |
| Packing unit | 1 piece |
| Range | A |
| GTIN (EAN) | 4012799840879 |


Characteristic curve

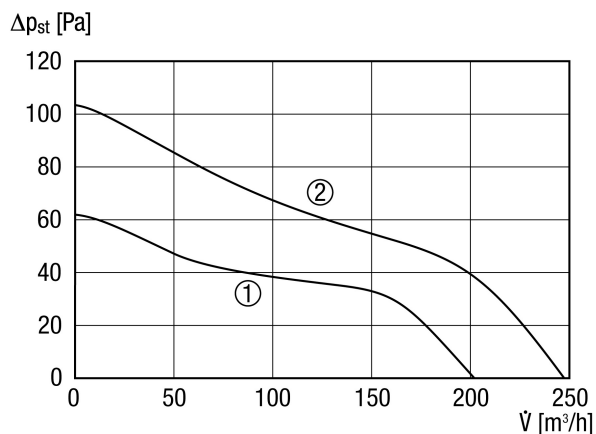

- ① Performance level 1
- ② Performance level 2

ECA 150 ipro RC

Dimensioned drawing [mm]

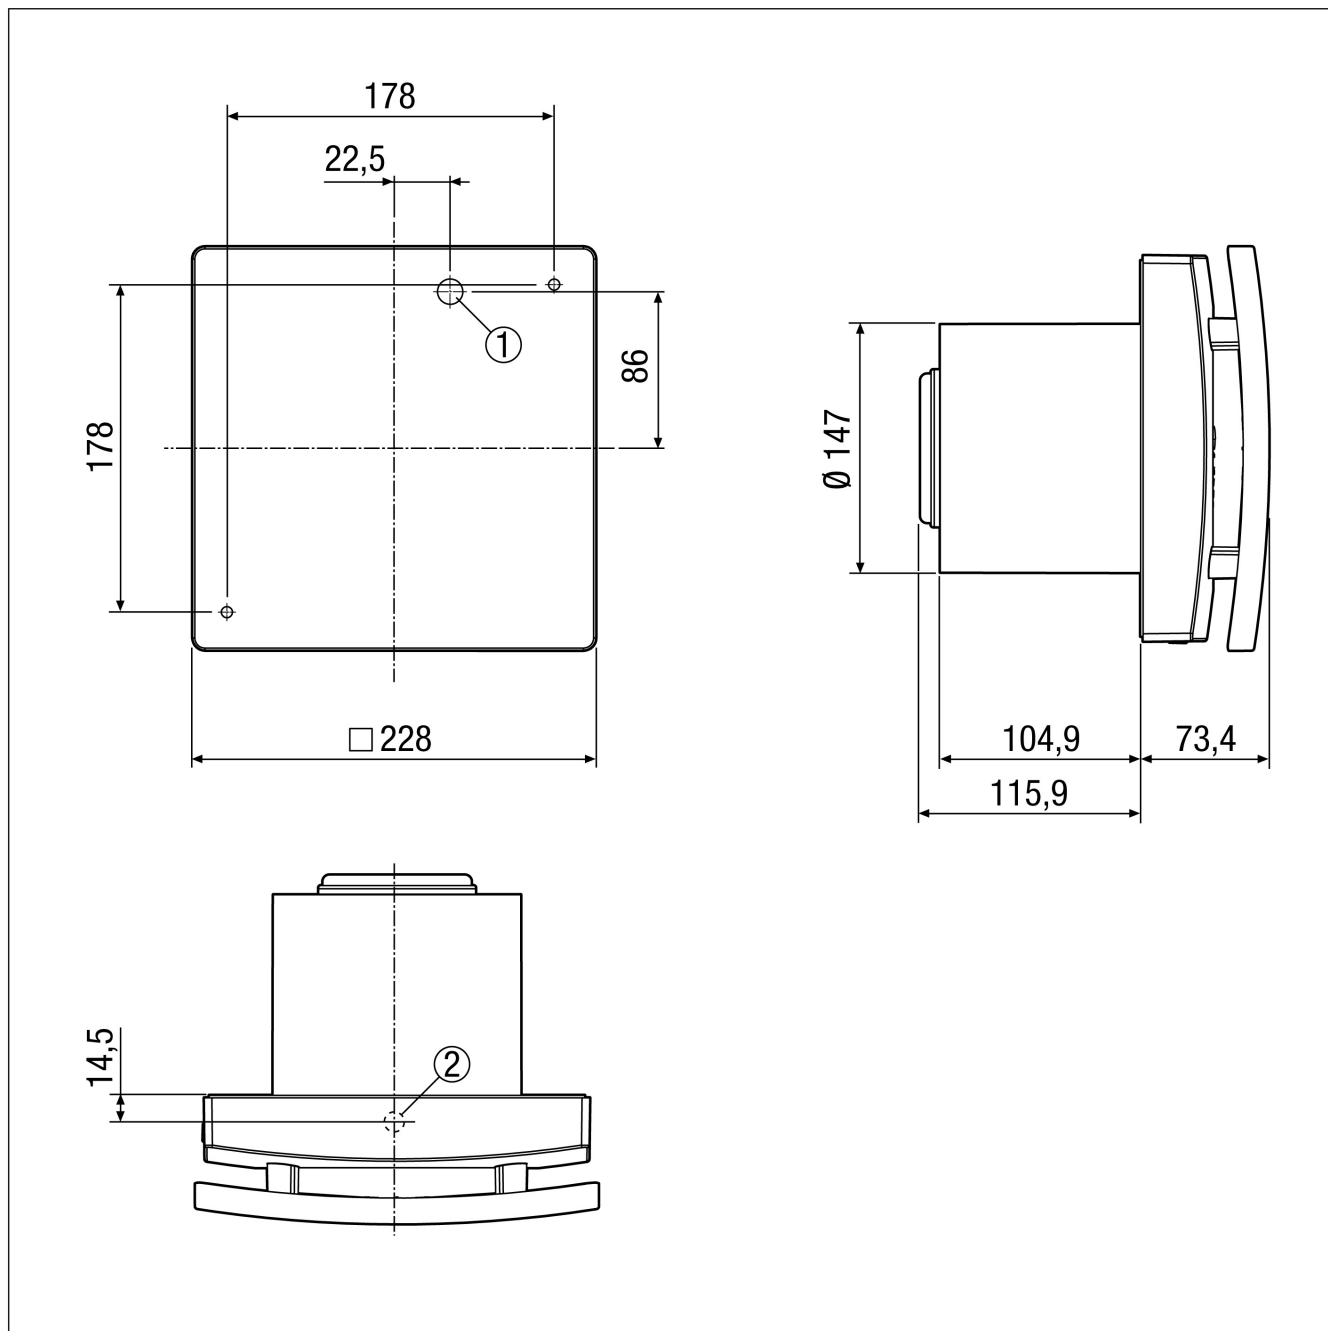

- ① Cable entry for recessed-mounted connection
- ② Cable bushing for surface-mounted connection