

ECR-A 20



Short description

Sound-insulated ventilation box fan suitable for ECR 20 compact box

Application examples

Day room, Foreman's office, Laboratory, Workshop, Storage facility

Article number 0080.0567

Technical data

Air flow volume	700 m³/h
Rotating speed	2.600 1/min
Speed controllable	–
Type of voltage	Alternating current
Rated voltage	230 V
Nominal output	110 W
I _{nom}	0,5 A
I _{max}	0,5 A
Degree of protection	IP 44
Housing material	Sheet steel, galvanised
Weight	17,2 kg
Weight including packaging	17,18 kg
Swivelling fan	✓
Nominal size	200 mm
Width with packaging	640 mm
Height with packaging	320 mm
Depth with packaging	500 mm
Airstream temperature at nominal current	40 °C
Airstream temperature at I _{Max}	-20 °C up to 40 °C
Ambient temperature	40 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799805670

Sound power level in octave range


	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA5, S5} (dB(A))	–	46	56	55	48	47	46	38	60

ECR-A 20

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
$L_{WA6, S5}$ (dB(A))	-	54	63	72	69	68	62	55	75
$L_{WA2, S5}$ (dB(A))	-	46	48	54	37	31	29	23	56

L_{WA2} = housing sound power level in dB.
 L_{WA5} = free inlet sound power level in dB.
 L_{WA6} = free outlet sound power level in dB.

Characteristic curve

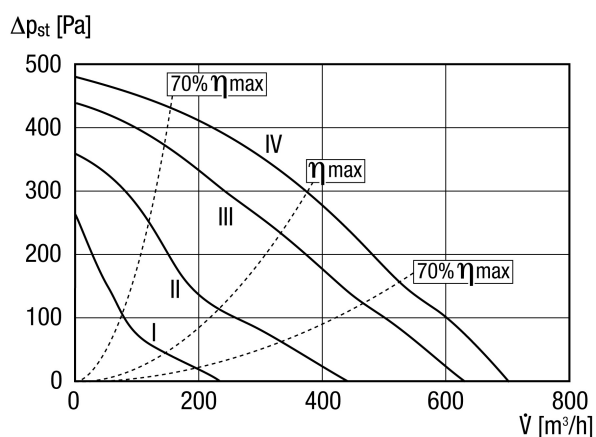

ECR-A 20

Dimensioned drawing [mm]

