

# ECR 25 EC



## Short description

Compact supply air device with integrated electrical air heater, EC motor, filter and controller, DN 250

## Application examples

Workplace, Doctor's practice, Day room, Fitness room, Restaurant

Article number 0080.0082

## Technical data

Air flow volume	1.090 m <sup>3</sup> /h
Rotating speed	2.970 1/min
Speed controllable	✓
Rated voltage	400 V
I <sub>nom fan</sub>	1 A
I <sub>Max total</sub>	14,1 A
Degree of protection	IP X4
Insulation class	F
Operator unit degree of protection	IP 00
Housing material	Sheet steel, galvanised
Weight	30,9 kg
Weight including packaging	33,934 kg
Filter class	G4
Nominal size	250 mm
Width with packaging	825 mm
Height with packaging	440 mm
Depth with packaging	480 mm
Airstream temperature at nominal current	40 °C
Airstream temperature at I <sub>Max</sub>	-20 °C up to 40 °C
Heater power rating	9.000 W
Packing unit	1 piece
Range	E
GTIN (EAN)	4012799800828

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA2, S1</sub></b> <b>(dB(A))</b>	51	52	57	54	64	50	50	44	65


# ECR 25 EC

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA2</sub>, S2</b> <b>(dB(A))</b>	52	51	55	53	64	49	49	43	66
<b>L<sub>WA2</sub>, S3</b> <b>(dB(A))</b>	47	47	58	51	68	46	46	39	68
<b>L<sub>WA2</sub>, S4</b> <b>(dB(A))</b>	51	49	63	55	67	58	58	53	70
<b>L<sub>WA2</sub>, S5</b> <b>(dB(A))</b>	51	48	57	55	55	43	41	34	66
<b>L<sub>WA5</sub>, S1</b> <b>(dB(A))</b>	54	63	67	66	65	61	62	56	72
<b>L<sub>WA5</sub>, S2</b> <b>(dB(A))</b>	51	61	65	64	64	61	62	56	71
<b>L<sub>WA5</sub>, S3</b> <b>(dB(A))</b>	42	56	64	63	66	60	61	55	70
<b>L<sub>WA5</sub>, S4</b> <b>(dB(A))</b>	44	57	70	70	67	61	62	56	74
<b>L<sub>WA5</sub>, S5</b> <b>(dB(A))</b>	52	56	70	69	67	61	62	56	75
<b>L<sub>WA6</sub>, S1</b> <b>(dB(A))</b>	74	61	66	65	67	69	66	59	74
<b>L<sub>WA6</sub>, S2</b> <b>(dB(A))</b>	74	59	66	65	66	69	66	59	74
<b>L<sub>WA6</sub>, S3</b> <b>(dB(A))</b>	72	54	65	63	66	67	64	58	72
<b>L<sub>WA6</sub>, S4</b> <b>(dB(A))</b>	76	55	72	66	67	69	65	58	76
<b>L<sub>WA6</sub>, S5</b> <b>(dB(A))</b>	77	55	73	68	68	71	66	59	77

L<sub>WA2</sub>= housing sound power level in dB.  
 L<sub>WA5</sub>= free inlet sound power level in dB.  
 L<sub>WA6</sub>= free outlet sound power level in dB.

# ECR 25 EC

Characteristic curve

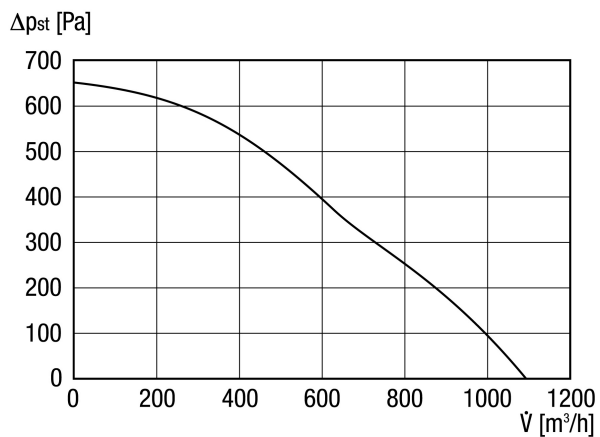

Dimensioned drawing [mm]

A	B	C	D	E
250	233	406	463	712

