

ENR 20



Short description

ENR model series

Application examples

Restaurant, Showroom, Building container, Lecture room, Nursery school

Article number 0081.0304

Technical data

Air flow volume	500 m ³ /h
Rotating speed	1.420 1/min
Air direction	Ventilation / Air extraction
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Alternating current
Rated voltage	230 V
Nominal output	30 W
I _{nom}	0,15 A
I _{max}	0,15 A
Installation site	Wall
Type of installation	Surface-mounted
Installation position	horizontal
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	2,88
Nominal size	200 mm
Sound pressure level	53 dB(A)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799813040


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L _{WA7, high} (dB(A))	-	-	-	-	-	-	-	-	61

L_{WA7}= housing and free inlet sound power level in dB.

ENR 20

Characteristic curve

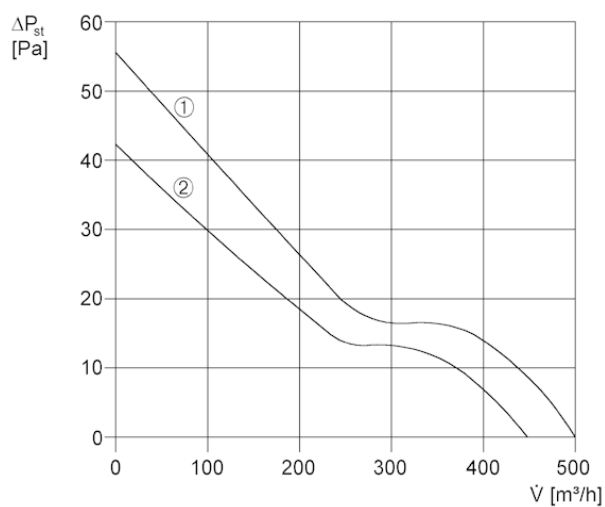

- ① ENR 20
- ② EN 20

Dimensioned drawing [mm]

