

# ENR 31



## Short description

ENR model series

## Application examples

Restaurant, Showroom, Building container, Lecture room, Nursery school

Article number 0081.0306

## Technical data

Air flow volume	1.800 m <sup>3</sup> /h
Rotating speed	1.410 1/min
Air direction	Ventilation / Air extraction
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Alternating current
Rated voltage	230 V
Nominal output	100 W
Power consumption	125 W
I <sub>nom</sub>	0,45 A
I <sub>max</sub>	0,55 A
Degree of protection	IP 20
Installation site	Wall
Type of installation	Surface-mounted
Installation position	horizontal
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	5,86
Nominal size	315 mm
Sound pressure level	65 dB(A)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799813064


## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L <sub>WA7, high</sub> (dB(A))	-	-	-	-	-	-	-	-	72

# ENR 31

$L_{WA7}$  = housing and free inlet sound power level in dB.

## Characteristic curve

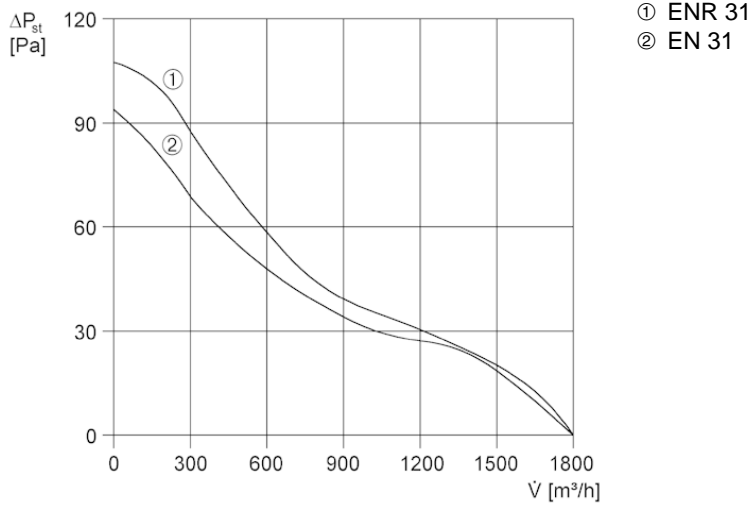

## Dimensioned drawing [mm]

