

# EN 20



## Short description

EN model series

## Application examples

Restaurant, Showroom, Building container, Lecture room, Nursery school

Article number 0081.0301

## Technical data

Air flow volume	450 m <sup>3</sup> /h
Rotating speed	1.330 1/min
Air direction	Air extraction
Speed controllable	✓
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Nominal output	35 W
I <sub>nom</sub>	0,25 A
I <sub>max</sub>	0,25 A
Installation site	Wall
Type of installation	Surface-mounted
Installation position	horizontal
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	2,695
Nominal size	200 mm
Sound pressure level	51 dB(A)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799813019


## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L <sub>WA7, high</sub> (dB(A))	–	–	–	–	–	–	–	–	59

L<sub>WA7</sub>= housing and free inlet sound power level in dB.

# EN 20

## Characteristic curve

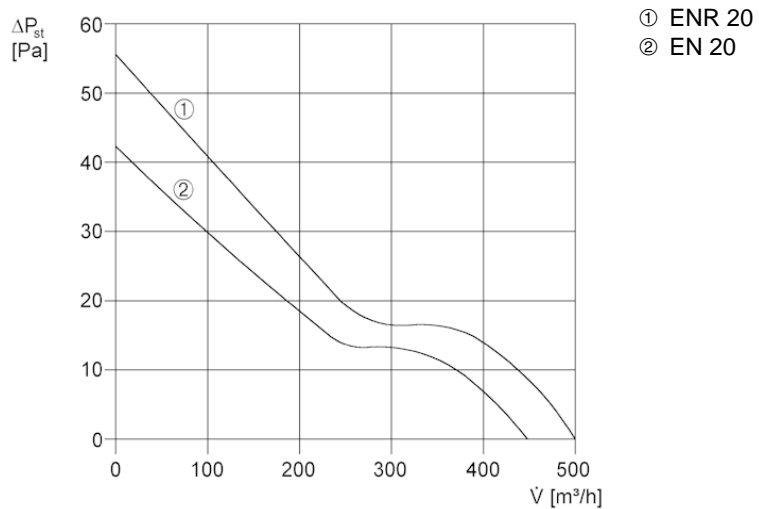

## Dimensioned drawing [mm]

