

ERK 160



Short description

Diagonal fan for duct installation, DN 160, two-level

Application examples

Production site, Storage facility, Day room, Showroom, Workshop

Article number 0080.0180

Technical data

Model	Standard model
Air flow volume	340 m ³ /h / 500 m ³ /h
Rotating speed	2.000 1/min / 2.700 1/min
Impeller type	diagonal
Speed controllable	✓
Reversing capacity	–
Rated voltage	230 V
Frequency	50 Hz
Nominal output	60 W / 80 W
I _{max}	0,27 A / 0,36 A
Degree of protection	IP 44
Insulation class	B
Installation position	vertical / horizontal
Material	PP plastic
Housing material	Polypropylene
Colour	white-grey
Weight	2,47 kg
Weight including packaging	3,02 kg
Nominal size	160 mm
Width	192 mm
Height	244 mm
Depth	312,6 mm
Width with packaging	245 mm
Height with packaging	290 mm
Depth with packaging	345 mm
Airstream temperature	40 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799801801


ERK 160

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA5, low} (dB(A))	–	47	57	60	60	53	45	32	60
L_{WA5, high} (dB(A))	–	48	60	63	64	57	48	37	65

L_{WA5}= free inlet sound power level in dB.

Characteristic curve

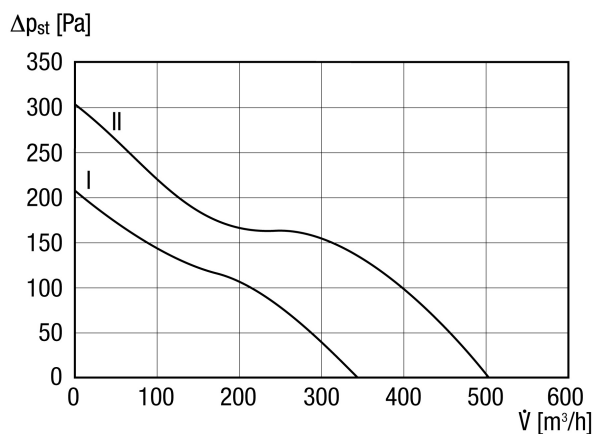

Dimensioned drawing [mm]

