

# ERR 15/1 EC



## Short description

Centrifugal duct fan, DN 150, air volume 481 m<sup>3</sup>/h, motor with EC technology

## Application examples

Machine extraction unit, Workplace air extraction system, Production site

Article number 0073.0568

## Technical data

Air flow volume	481 m <sup>3</sup> /h
Rotating speed	3.395 1/min
Impeller type	radial
Speed controllable	✓
Reversing capacity	–
SEC average	-27 kWh/(m <sup>2</sup> *a)
Energy efficiency class	B
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Nominal output	77 W
I <sub>max</sub>	0,7 A
Degree of protection	IP X4
Insulation class	F
Pole-changeable	–
Installation site	Duct
Installation position	vertical / horizontal
Material	Sheet steel, powder coated
Housing material	Sheet steel, powder coated
Colour	Light grey
Weight	3,1 kg
Weight including packaging	3,3 kg
Nominal size	150 mm
Width	216 mm
Height	268 mm
Depth	245 mm
Width with packaging	310 mm
Height with packaging	310 mm
Depth with packaging	270 mm

# ERR 15/1 EC


Airstream temperature at $I_{Max}$	60 °C
Sound pressure level	39 dB(A) (Distance 3 m, Free-field conditions)
Packing unit	1 piece
Range	E
GTIN (EAN)	4012799735687

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA3, S3</sub></b> <b>(dB(A))</b>	-	-	-	-	-	-	-	-	60

LWA3  
Distance 3 m, Free-field conditions

## Characteristic curve

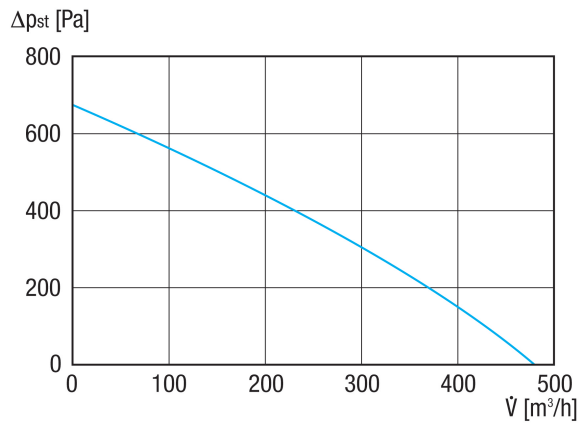

# ERR 15/1 EC

Dimensioned drawing [mm]

