

ERR 16/1



Short description

Centrifugal duct fan, DN 160, air volume 350 m³/h, single-phase AC

Application examples

Machine extraction unit, Workplace air extraction system, Production site, Storage facility, Laboratory

Article number 0080.0273

Technical data

Air flow volume	350 m ³ /h
Rotating speed	2.163 1/min
Impeller type	radial
Speed controllable	✓
Reversing capacity	–
SEC average	-11 kWh/(m ² *a)
Type of voltage	Alternating current
Rated voltage	230 / 220 V
Frequency	50 Hz/60 Hz
Nominal output	29 W
I _{max}	0,14 A
Degree of protection	IP X4
Insulation class	F
Pole-changeable	–
Installation position	vertical / horizontal
Material	Sheet steel, powder coated
Housing material	Sheet steel, powder coated
Colour	Light grey
Weight	2,76 kg
Weight including packaging	3,32 kg
Nominal size	160 mm
Width	250 mm
Height	237 mm
Depth	210 mm
Width with packaging	310 mm
Height with packaging	310 mm
Depth with packaging	270 mm
Airstream temperature at nominal current	-20 °C up to 60 °C
Airstream temperature at I _{Max}	-20 °C up to 60 °C

ERR 16/1

Packing unit	1 piece
Range	C
GTIN (EAN)	4012799802730

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA2}, S1 (dB(A))	18	22	25	23	20	21	1	–	30
L_{WA2}, S2 (dB(A))	15	25	29	32	29	21	14	5	35
L_{WA2}, S3 (dB(A))	19	29	35	38	38	34	32	18	43
L_{WA2}, S4 (dB(A))	26	33	39	42	44	41	40	28	49
L_{WA2}, S5 (dB(A))	29	36	43	47	48	45	46	35	53
L_{WA5}, S1 (dB(A))	16	21	25	34	33	23	10	–	37
L_{WA5}, S2 (dB(A))	18	27	33	43	45	39	27	14	48
L_{WA5}, S3 (dB(A))	26	34	40	52	55	53	42	32	58
L_{WA5}, S4 (dB(A))	32	38	45	57	60	61	50	42	65
L_{WA5}, S5 (dB(A))	37	42	50	62	65	65	57	49	70
L_{WA6}, S1 (dB(A))	15	21	28	34	32	19	2	–	37
L_{WA6}, S2 (dB(A))	19	28	37	44	45	36	27	13	48
L_{WA6}, S3 (dB(A))	27	35	45	54	55	50	43	31	59
L_{WA6}, S4 (dB(A))	32	39	50	58	60	56	50	40	63
L_{WA6}, S5 (dB(A))	36	43	53	63	64	61	57	47	68


L_{WA2}= housing sound power level in dB.

L_{WA5}= free inlet sound power level in dB.

L_{WA6}= free outlet sound power level in dB.

ERR 16/1

Characteristic curve

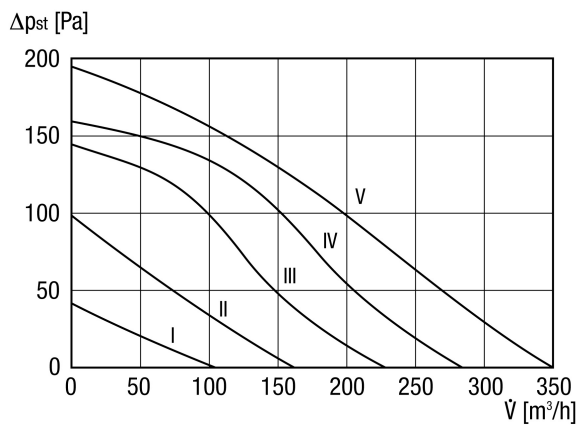

Dimensioned drawing [mm]

