

ESQ 45/4 K



Short description

Sound-insulated radial fan for high temperatures, alternating current, DN 450

Application examples

High temperatures of up to 180°C, Workplace air extraction system, Machine extraction unit

Article number 0080.0073

Technical data

Air flow volume	5.000 m ³ /h
Speed controllable	✓
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	750 W
P _{Max}	750 W
I _{nom}	5,6 A
I _{max}	5,6 A
Degree of protection	IP 55
Insulation class	F
Mains cable	3 x 1,5 mm ²
Installation position	vertical / horizontal
Housing material	Sheet steel, galvanised
Weight	82 kg
Weight including packaging	82,45 kg
Swivelling fan	–
Nominal size	450 mm
Width	750 mm
Height	900 mm
Depth	805 mm
Width with packaging	862 mm
Height with packaging	902 mm
Depth with packaging	762 mm
Airstream temperature at nominal current	180 °C
Airstream temperature at I _{Max}	180 °C
Sound pressure level	53 dB(A) (Distance 3 m, Free-field conditions)
Packing unit	1 piece
Range	C

ESQ 45/4 K


GTIN (EAN)	4012799800736
------------	---------------

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA2} (dB(A))	–	57	60	55	59	48	47	42	65
L_{WA5} (dB(A))	–	64	70	72	76	69	65	60	79
L_{WA6} (dB(A))	–	64	72	74	81	75	74	71	84

L_{WA2}= housing sound power level in dB.
 L_{WA5}= free inlet sound power level in dB.
 L_{WA6}= free outlet sound power level in dB.

Characteristic curve

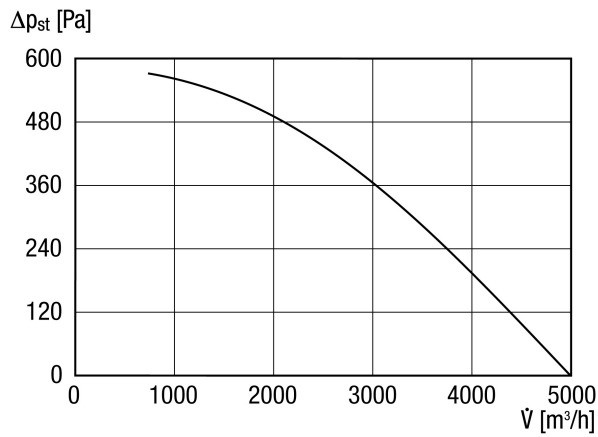

ESQ 45/4 K

Dimensioned drawing [mm]

