

ESR 20-3 EC



Short description

Sound-insulated ventilation box with EC motor and swivelling fan, DN 200, single-phase AC

Application examples

Commercial premises, Showroom, Office, Foreman's office, Changing room

Article number 0080.1002

Technical data

Air flow volume	770 m ³ /h
Rotating speed	2.300 1/min
Impeller type	radial
Speed controllable	✓
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Nominal output	102 W
I _{max}	0,9 A
Degree of protection	IP 54
Insulation class	F
Installation site	Wall / ceiling
Installation position	vertical / horizontal
Material	Sheet steel, galvanised
Colour	Silver
Weight	17,55 kg
Weight including packaging	19,35 kg
Swivelling fan	✓
Nominal size	200 mm
Width	486 mm
Height	287 mm
Depth	567 mm
Width with packaging	500 mm
Height with packaging	320 mm
Depth with packaging	635 mm
Airstream temperature at I _{Max}	60 °C
Ambient temperature	-30 °C up to 60 °C
Packing unit	1 piece
Range	E
GTIN (EAN)	4012799981053

ESR 20-3 EC


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA2}, S1 (dB(A))	35	33	23	25	6	6	5	5	37
L_{WA2}, S2 (dB(A))	35	42	36	37	25	19	29	26	45
L_{WA2}, S3 (dB(A))	36	45	46	45	34	28	21	12	50
L_{WA2}, S4 (dB(A))	42	49	52	51	40	34	28	28	56
L_{WA2}, S5 (dB(A))	45	53	55	57	45	39	31	29	60
L_{WA5}, S1 (dB(A))	24	31	29	21	17	17	35	28	38
L_{WA5}, S2 (dB(A))	29	44	42	34	30	32	29	31	47
L_{WA5}, S3 (dB(A))	34	42	53	42	38	39	38	27	54
L_{WA5}, S4 (dB(A))	39	46	60	49	45	46	43	36	61
L_{WA5}, S5 (dB(A))	43	50	63	57	50	51	47	42	64
L_{WA6}, S1 (dB(A))	30	34	36	40	37	36	20	41	46
L_{WA6}, S2 (dB(A))	30	46	49	52	50	52	43	26	57
L_{WA6}, S3 (dB(A))	35	49	59	60	58	60	54	42	66
L_{WA6}, S4 (dB(A))	40	53	65	67	65	67	60	54	72
L_{WA6}, S5 (dB(A))	44	57	69	73	70	72	64	61	77

L_{WA2}= housing sound power level in dB.
 L_{WA5}= free inlet sound power level in dB.
 L_{WA6}= free outlet sound power level in dB.

ESR 20-3 EC

Characteristic curve

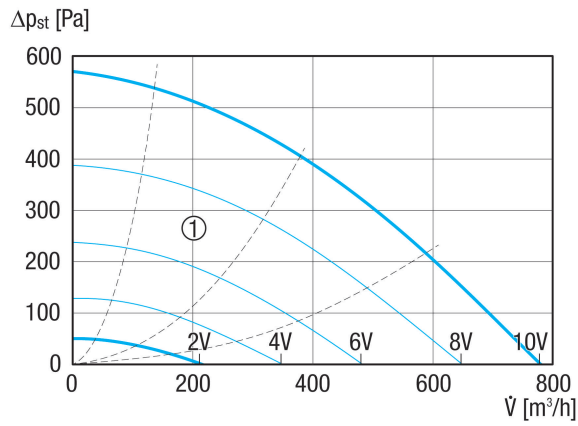

① Auxiliary characteristics curves for control voltage 2 - 10 V

ESR 20-3 EC

Dimensioned drawing [mm]

