

ESR 20 EC



Short description

Sound-insulated ventilation box with EC motor and swivelling fan, DN 200, alternating current

Application examples

Commercial premises, Showroom, Office, Foreman's office, Changing room

Article number 0080.0086

Technical data

Air flow volume	840 m ³ /h
Rotating speed	2.878 1/min
Speed controllable	✓
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Nominal output	118 W
Power consumption	118 W
I _{nom}	0,9 A
I _{max}	0,9 A
Degree of protection	IP X4
Insulation class	F
Installation position	vertical / horizontal
Material	Sheet steel, galvanised
Housing material	Sheet steel, galvanised
Colour	Silver
Weight	18,95 kg
Weight including packaging	20,67 kg
Swivelling fan	✓
Nominal size	200 mm
Width	533 mm
Height	482 mm
Depth	287 mm
Width with packaging	635 mm
Height with packaging	500 mm
Depth with packaging	320 mm
Airstream temperature at nominal current	-20 °C up to 60 °C
Ambient temperature	-15 °C up to 60 °C
Packing unit	1 piece
Range	E

ESR 20 EC

GTIN (EAN)	4012799800866
------------	---------------


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA2}, S1 (dB(A))	46	52	52	52	45	45	46	40	58
L_{WA2}, S2 (dB(A))	45	49	51	52	44	44	44	39	57
L_{WA2}, S3 (dB(A))	43	45	52	53	43	39	38	35	56
L_{WA2}, S4 (dB(A))	45	48	53	55	43	35	33	30	58
L_{WA2}, S5 (dB(A))	46	51	56	58	47	38	34	29	61
L_{WA5}, S1 (dB(A))	41	53	58	50	48	46	47	40	60
L_{WA5}, S2 (dB(A))	41	51	58	50	47	46	46	40	60
L_{WA5}, S3 (dB(A))	39	47	58	51	47	45	45	37	60
L_{WA5}, S4 (dB(A))	42	49	60	53	49	46	44	36	61
L_{WA5}, S5 (dB(A))	44	53	62	56	52	50	48	40	64
L_{WA6}, S1 (dB(A))	45	62	68	69	67	66	59	52	74
L_{WA6}, S2 (dB(A))	44	59	66	69	67	65	59	51	73
L_{WA6}, S3 (dB(A))	42	54	68	69	66	64	59	50	73
L_{WA6}, S4 (dB(A))	42	56	69	72	69	67	62	54	76
L_{WA6}, S5 (dB(A))	44	60	70	75	72	71	66	59	79

L_{WA2}= housing sound power level in dB.
 L_{WA5}= free inlet sound power level in dB.
 L_{WA6}= free outlet sound power level in dB.

ESR 20 EC

Characteristic curve

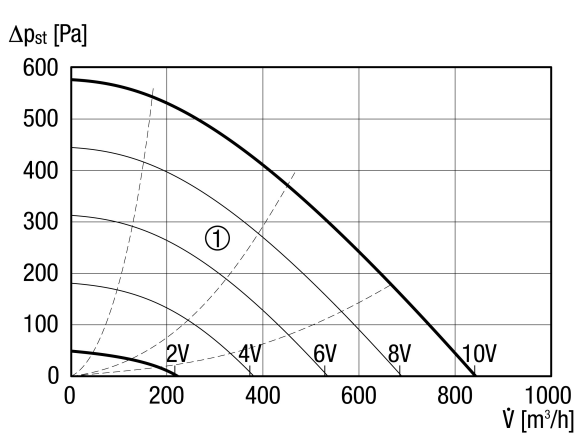

Auxiliary characteristics curves for control voltage 2 - 10 V

Dimensioned drawing [mm]

