

# ESR 25-2



## Short description

Sound-insulated ventilation box, DN 250, alternating current

## Application examples

Commercial premises, Showroom, Office, Changing room, Foreman's office

Article number 0080.0613

## Technical data

Air flow volume	1.100 m <sup>3</sup> /h
Rotating speed	1.840 1/min
Speed controllable	✓
Type of voltage	Alternating current
Rated voltage	230 V
Nominal output	290 W
I <sub>nom</sub>	0,9 A
I <sub>max</sub>	1,3 A
Degree of protection	IP X4
Insulation class	F
Housing material	Sheet steel, galvanised
Weight	16,9 kg
Weight including packaging	18,96 kg
Nominal size	250 mm
Width with packaging	640 mm
Height with packaging	315 mm
Depth with packaging	500 mm
Airstream temperature at nominal current	-20 °C up to 50 °C
Airstream temperature at I <sub>Max</sub>	-20 °C up to 50 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799806134

## Sound power level in octave range


	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA2, S5</sub></b> <b>(dB(A))</b>	–	46	41	39	34	31	36	33	48

# ESR 25-2

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
<b>L<sub>WA5, S5</sub></b> <b>(dB(A))</b>	–	55	54	50	46	48	51	46	60
<b>L<sub>WA6, S5</sub></b> <b>(dB(A))</b>	–	55	59	63	69	68	67	63	74

L<sub>WA2</sub>= housing sound power level in dB.  
 L<sub>WA5</sub>= free inlet sound power level in dB.  
 L<sub>WA6</sub>= free outlet sound power level in dB.

## Characteristic curve

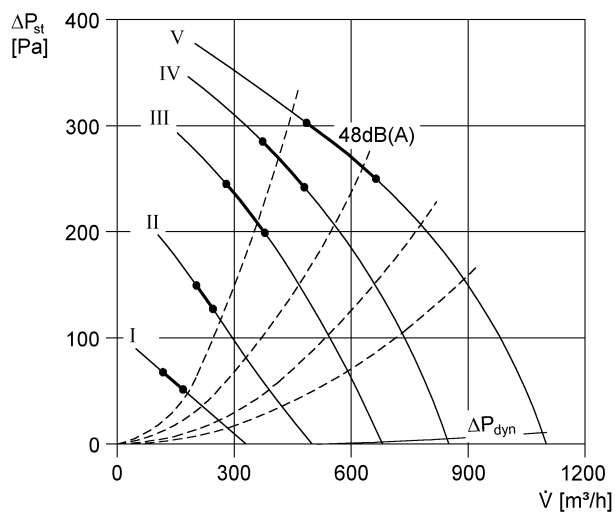

# ESR 25-2

Dimensioned drawing [mm]

