

ESR 25-2 EC



Short description

Sound-insulated ventilation box with EC motor and swivelling fan, DN 255, alternating current

Application examples

Commercial premises, Showroom, Office, Foreman's office, Changing room

Article number 0080.0713

Technical data

Air flow volume	1.190 m³/h
Rotating speed	3.210 1/min
Speed controllable	✓
Rated voltage	230 V
Frequency	50 Hz
Nominal output	204 W
I _{nom}	1,4 A
I _{max}	1,4 A
Degree of protection	IP 44
Insulation class	B
Installation position	vertical / horizontal
Material	Sheet steel, galvanised
Housing material	Sheet steel, galvanised
Colour	Silver
Weight	18,202 kg
Weight including packaging	20,4 kg
Swivelling fan	✓
Nominal size	250 mm
Width	480 mm
Height	287 mm
Depth	577 mm
Width with packaging	500 mm
Height with packaging	320 mm
Depth with packaging	640 mm
Airstream temperature at I _{Max}	-20 °C up to 50 °C
Packing unit	1 piece
Range	E
GTIN (EAN)	4012799807131


ESR 25-2 EC

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA2}, high (dB(A))	39	49	65	57	51	49	44	36	65
L_{WA5}, high (dB(A))	46	61	78	67	64	60	55	50	78
L_{WA6}, high (dB(A))	49	58	79	73	73	74	68	59	81

L_{WA2}= housing sound power level in dB.
 L_{WA5}= free inlet sound power level in dB.
 L_{WA6}= free outlet sound power level in dB.

Characteristic curve

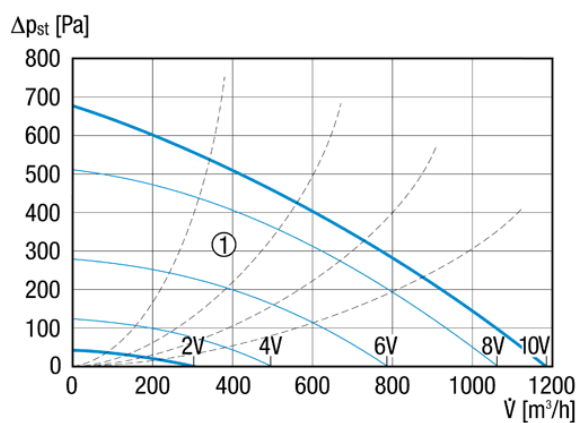

① Auxiliary characteristics curves for control voltage 2 - 10 V

ESR 25-2 EC

Dimensioned drawing [mm]

