

ESR 25 EC



Short description

Sound-insulated ventilation box with EC motor and swivelling fan, DN 250, alternating current

Application examples

Commercial premises, Showroom, Office, Foreman's office, Changing room

Article number 0080.0087

Technical data

Air flow volume	1.130 m³/h
Rotating speed	2.770 1/min
Speed controllable	✓
Rated voltage	230 V
Frequency	50 Hz/60 Hz
Nominal output	204 W
Power consumption	204 W
I _{nom}	1,3 A
I _{max}	1,5 A
Degree of protection	IP X4
Insulation class	B
Installation position	vertical / horizontal
Material	Sheet steel, galvanised
Housing material	Sheet steel, galvanised
Colour	Silver
Weight	18,85 kg
Weight including packaging	20,65 kg
Swivelling fan	✓
Nominal size	250 mm
Width	577 mm
Height	482 mm
Depth	287 mm
Width with packaging	640 mm
Height with packaging	495 mm
Depth with packaging	320 mm
Airstream temperature at nominal current	-20 °C up to 70 °C
Ambient temperature	-20 °C up to 70 °C
Packing unit	1 piece
Range	E

ESR 25 EC

GTIN (EAN)	4012799800873
------------	---------------


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA2}, S1 (dB(A))	40	47	59	57	70	48	43	38	71
L_{WA2}, S2 (dB(A))	40	47	60	57	70	48	41	34	71
L_{WA2}, S3 (dB(A))	41	48	61	58	70	48	40	32	71
L_{WA2}, S4 (dB(A))	43	50	63	59	70	48	38	30	71
L_{WA2}, S5 (dB(A))	460	53	64	63	71	48	39	33	72
L_{WA5}, S1 (dB(A))	43	52	65	60	71	52	50	42	72
L_{WA5}, S2 (dB(A))	43	52	65	59	71	53	50	42	72
L_{WA5}, S3 (dB(A))	43	52	65	59	71	53	51	42	72
L_{WA5}, S4 (dB(A))	45	54	67	60	70	55	53	43	73
L_{WA5}, S5 (dB(A))	48	58	71	64	74	58	56	49	76
L_{WA6}, S1 (dB(A))	39	55	71	72	73	69	63	54	78
L_{WA6}, S2 (dB(A))	39	54	71	73	74	69	64	54	78
L_{WA6}, S3 (dB(A))	39	54	71	73	74	70	64	55	79
L_{WA6}, S4 (dB(A))	41	58	72	74	76	73	67	58	80
L_{WA6}, S5 (dB(A))	44	61	75	77	78	76	70	63	83

L_{WA2}= housing sound power level in dB.
 L_{WA5}= free inlet sound power level in dB.
 L_{WA6}= free outlet sound power level in dB.

ESR 25 EC

Characteristic curve

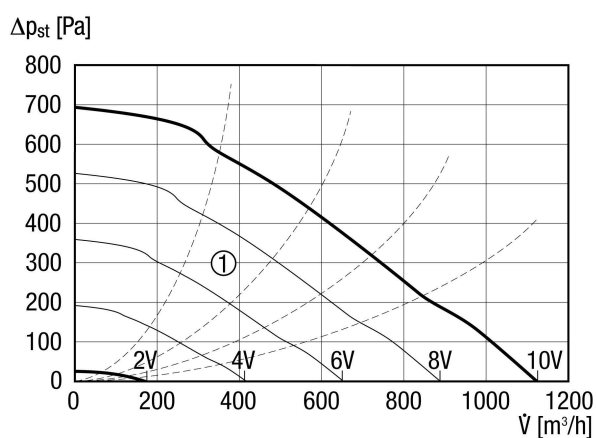

Auxiliary characteristics curves for control voltage 2 - 10 V

Dimensioned drawing [mm]

