

ET 31



Short description

ET model series

Application examples

Restaurant, Showroom, Building container, Lecture room, Nursery school

Article number 0081.0503

Technical data

Air flow volume	1.800 m ³ /h
Rotating speed	1.425 1/min
Air direction	Air extraction
Speed controllable	✓
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Nominal output	90 W
Power consumption	110 W
I _{nom}	0,5 A
I _{max}	0,6 A
Degree of protection	IP 24
Installation site	Wall
Type of installation	Surface-mounted
Installation position	horizontal
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	6
Nominal size	315 mm
Sound pressure level	65 dB(A)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799815037


Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L _{WA7, high} (dB(A))	–	–	–	–	–	–	–	–	74

ET 31

L_{WA7} = housing and free inlet sound power level in dB.

Characteristic curve

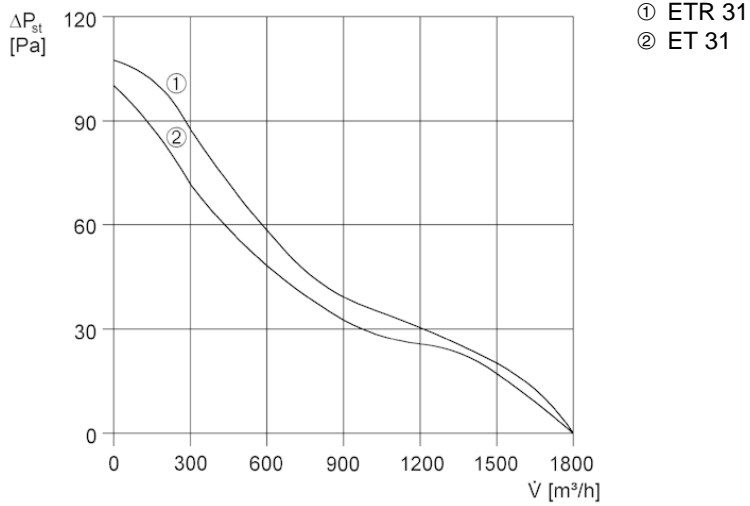

Dimensioned drawing [mm]

① Inside

