


MA-FR63

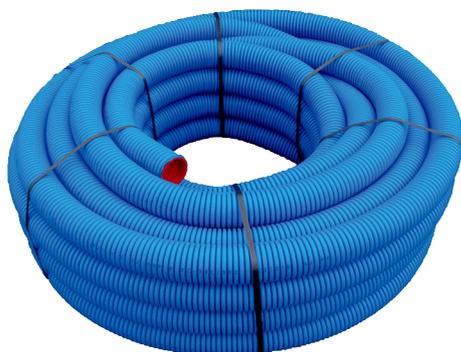

Short description

Flexible PE-HD duct, length 50 m, external diameter 63 mm, max. 20 m³/h, bending radius ≥ 0.26 m

Application examples

Single-family house, Multiple family unit, Industrial building, Office buildings, Modernizations


Article number 0152.0090

Technical data

Air direction	Ventilation and air extraction
Volumetric flow	20 m ³ /h (recommended)
Installation site	Ceiling / Floor / Wall
Material	Polyethylene (PE)
Synthetic material definition	PVC-free
Fire behaviour	Normally inflammable building material (fire behaviour E according to DIN EN 13501-1: 2010)
Annular rigidity	≤ 10kN/m ² in accordance with EN ISO 9969
Colour	Blue
Weight	13 kg
Weight including packaging	13,5 kg
Nominal size	63 mm
Internal diameter	51,5 mm
Length	50.000 mm
Width	64 mm
Height	64 mm
Depth	50.000 mm
Width with packaging	1.040 mm
Height with packaging	360 mm
Depth with packaging	1.040 mm
Minimum bend radius	260 mm
Ambient temperature	-20 °C up to 60 °C
Packing unit	1 x 50 m roll
Range	K
GTIN (EAN)	4012799520900

MA-FR63

Characteristic curve

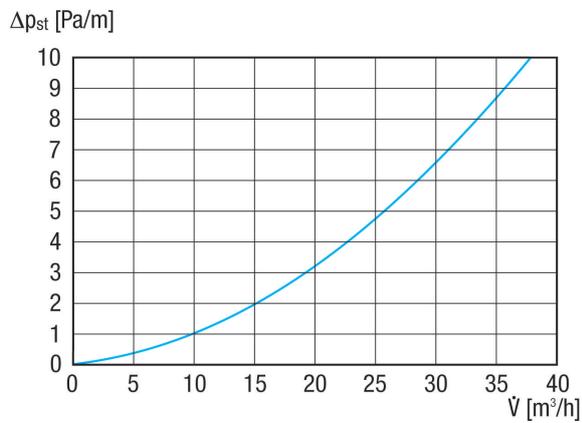

Dimensioned drawing [mm]

