


MA-FR75

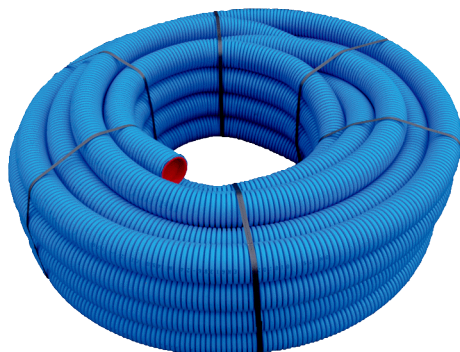

Short description

Flexible PE-HD duct, length 50 m, external diameter 75 mm, max. 30 m³/h, bending radius ≥ 0.29m.

Application examples

Single-family house, Multiple family unit, Industrial building, Office buildings, Modernizations


Article number 0152.0091

Technical data

Air direction	Ventilation and air extraction
Volumetric flow	30 m ³ /h (recommended)
Installation site	Ceiling / Floor / Wall
Material	Polyethylene (PE)
Synthetic material definition	PVC-free
Fire behaviour	Normally inflammable building material (fire behaviour E according to DIN EN 13501-1: 2010)
Annular rigidity	≤ 10kN/m ² in accordance with EN ISO 9969
Colour	Blue
Weight	16 kg
Weight including packaging	16,5 kg
Nominal size	75 mm
Internal diameter	61,5 mm
Length	50.000 mm
Width	76 mm
Height	76 mm
Depth	50.000 mm
Width with packaging	1.145 mm
Height with packaging	385 mm
Depth with packaging	1.145 mm
Minimum bend radius	290 mm
Ambient temperature	-20 °C up to 60 °C
Packing unit	1 x 50 m roll
Range	K
GTIN (EAN)	4012799520917

MA-FR75

Characteristic curve

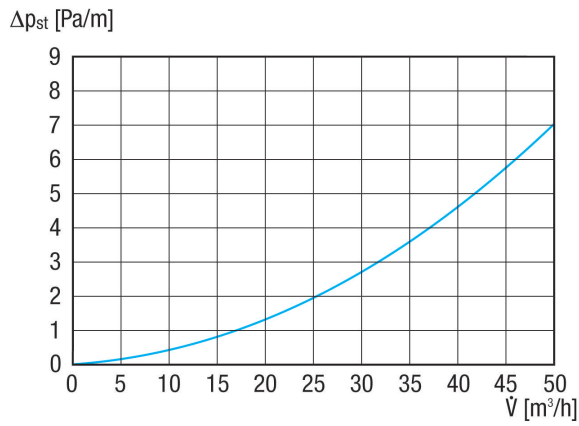

Dimensioned drawing [mm]

