

MF-F63



Short description

Flexible PE-HD duct, length 50 m, external diameter 63 mm, max. 20 m³/h, bending radius ≥ 150 mm, pressure-resistant for setting in concrete in Filigran slab

Application examples

Single-family house, Multiple family unit, Industrial building, Office buildings, Modernizations


Article number 0055.0097

Technical data

Air direction	Ventilation and air extraction
Volumetric flow	20 m ³ /h (recommended)
Installation site	Ceiling / Floor / Wall
Material	Polyethylene (PE)
Synthetic material definition	PVC-free
Fire behaviour	Normally inflammable building material (fire behaviour E according to DIN EN 13501-1: 2010)
Annular rigidity	≥ 8 kN/m ² in accordance with EN ISO 9969
Weight	16,5 kg
Weight including packaging	17 kg
Nominal size	63 mm
Internal diameter	53,5 mm
Length	50 m
Width	64 mm
Height	64 mm
Depth	50.000 mm
Width with packaging	1.082 mm
Height with packaging	332 mm
Depth with packaging	1.082 mm
Minimum bend radius	150 mm
Ambient temperature	-20 °C up to 60 °C
Packing unit	1 x 50 m roll
Range	K
GTIN (EAN)	4012799550976

MF-F63

Characteristic curve

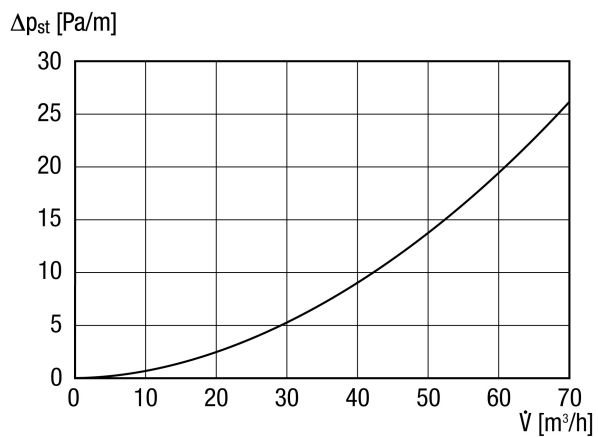

Dimensioned drawing [mm]

