

# MT-B125 90/45



## Short description

Thermally insulated ventilation duct elbow, 90°, can be separated into 2 x 45°, DN 125

## Application examples

Single-family house, Multiple family unit, New build, Redevelopment, Non-residential buildings


Article number 0059.0983

## Technical data

|                            |  |
|----------------------------|--|
| Volumetric flow            | 200 m³/h (recommended)                                 |
| Inner wall material        | Insulating polyolefin foam to prevent vapour diffusion |
| Casing tube material       | Polyethylene (HDPE)                                    |
| Colour                     | Black  |
| Weight                     | 0,3 kg   |
| Weight including packaging | 0,34 kg  |
| Nominal size               | 125 mm   |
| Internal diameter          | 125 mm   |
| External diameter          | 160 mm   |
| Width                      | 247 mm   |
| Height                     | 160 mm   |
| Depth                      | 160 mm   |
| Width with packaging       | 247 mm   |
| Height with packaging      | 160 mm   |
| Depth with packaging       | 160 mm   |
| Wall thickness             | 15 mm  |
| Airstream temperature      | -40 °C up to 95 °C                                     |
| Ambient temperature        | -40 °C up to 95 °C                                     |
| Heat coefficient           | 0.040 W/m²K at 40 °C                                   |
| Packing unit               | 1 piece  |
| Range                      | K  |
| GTIN (EAN)                 | 4012799599838  |

# MT-B125 90/45

## Characteristic curve

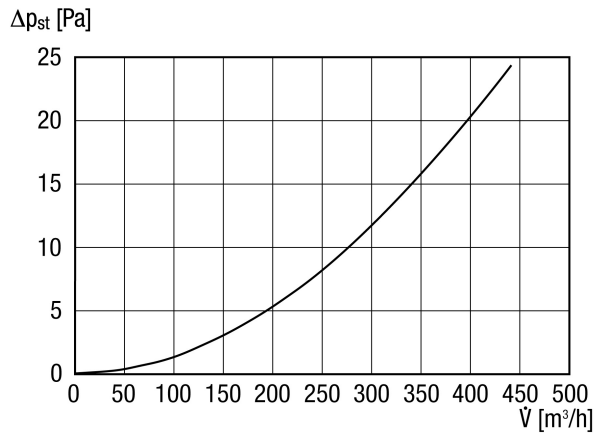

## Dimensioned drawing [mm]

① Separating line for 45° elbow

