

# MT-R125



## Short description

Thermally insulated and sound-absorbing ventilation duct, heat coefficient 0.040 W/m\*K at 40 °C, length 2 m, DN 125

## Application examples

Single-family house, Multiple family unit, New build, Redevelopment, Non-residential buildings


Article number 0059.0981

## Technical data

Volumetric flow	200 m³/h (recommended)
Inner wall material	Insulating polyolefin foam to prevent vapour diffusion
Casing tube material	Polyethylene (HDPE)
Colour	Black
Weight	2,59 kg
Weight including packaging	2,6 kg
Nominal size	125 mm
Internal diameter	125 mm
External diameter	160 mm
Length	2 m
Width	160 mm
Height	160 mm
Depth	2.000 mm
Width with packaging	160 mm
Height with packaging	160 mm
Depth with packaging	2.000 mm
Wall thickness	15 mm
Airstream temperature	-40 °C up to 95 °C
Ambient temperature	-40 °C up to 95 °C
Heat coefficient	0.040 W/m*K at 40 °C
Packing unit	2 m
Range	K
GTIN (EAN)	4012799599814

# MT-R125

## Characteristic curve

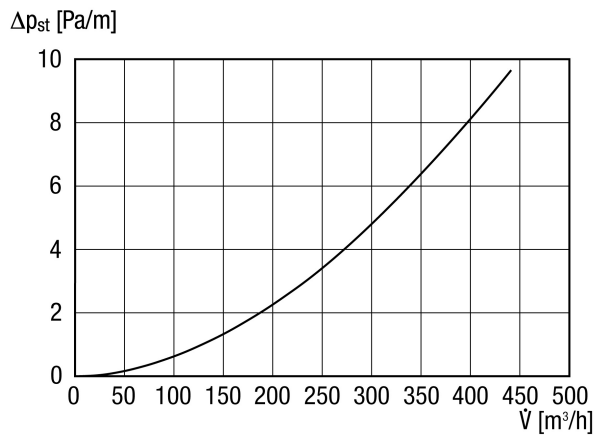

## Dimensioned drawing [mm]

