

PP 45 SE



Short description

Sound-absorbing element as optional accessory for PP 45 O, PP 45 K and PP 45 RC final assembly kit


Article number 0093.0308

Technical data

| | |
|----------------------------|---|
| Installation site | Wall |
| Material | melamine resin |
| Colour | grey |
| Weight | 0,02 kg |
| Weight including packaging | 0,02 kg |
| Fire protection | Fire-proof class B1 |
| External diameter | 154 mm |
| Width | 154 mm |
| Height | 154 mm |
| Depth | 100 mm |
| Width with packaging | 156 mm |
| Height with packaging | 156 mm |
| Depth with packaging | 101 mm |
| Insertion loss at 63 Hz | |
| Insertion loss at 125 Hz | |
| Insertion loss at 250 Hz | |
| Insertion loss at 500 Hz | |
| Insertion loss at 1 kHz | |
| Insertion loss at 2 kHz | |
| Insertion loss at 4 kHz | |
| Insertion loss at 8 kHz | |
| Total insertion loss | 2 dB |
| Insertion loss note | with 2x PP45 SE (turned 45°): 2.5-5 dB(A) |
| Sound insulation | yes |
| Packing unit | 1 piece |
| Range | K |
| GTIN (EAN) | 4012799933083 |

PP 45 SE

Characteristic curve

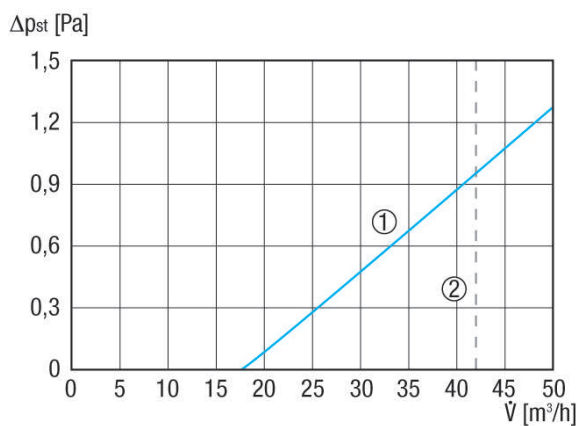

- ① Maximum pressure loss characteristics curve with two PP 45 SE sound-absorbing elements (10 cm), positioned turned 45° to one another
- ② Maximum volumetric flow (42 m³/h) of the PP 45 K, PP 45 O and PP 45 RC final assembly kits

Dimensioned drawing [mm]

