


# WRG 20-2

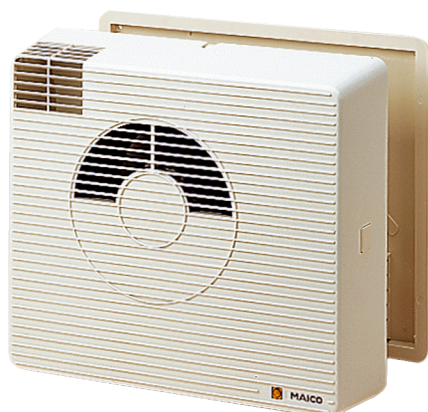

## Short description

Heat recovery unit for window installation

Article number 0082.0225

## Technical data

Air flow volume	100 m <sup>3</sup> /h
Rotating speed	1.320 1/min
Speed controllable	✓
Rated voltage	230 V
Power consumption	35 W
I <sub>max</sub>	0,2 A
Degree of protection	IP 44
Installation site	Window
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	5,3
Weight including packaging	5,3 kg
Width with packaging	360 mm
Height with packaging	160 mm
Depth with packaging	490 mm
Airstream temperature at I <sub>Max</sub>	40 °C
Heat recovery rate	50 %
Packing unit	1 piece
Range	D
GTIN (EAN)	4012799822257

## Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L <sub>WA7, high</sub> (dB(A))	-	-	-	-	-	-	-	-	55

L<sub>WA7</sub>= housing and free inlet sound power level in dB.

# WRG 20-2

Dimensioned drawing [mm]

