


## MS 160 S

### MS and MS...S

- For round air guidance (preferably folded spiral-seams ducts) according to DIN EN 1506, for shutting off or continuously controlling air flows in room air-related systems. Particularly well suited to tight spaces. Use of the MAICO MSR 100 – 160 accessory simplifies mounting considerably. One unit comprises shutter drive and air shutter.
- Other common features:
  - Current reduction in standby or holding mode
  - Shutter blade and servomotor require no maintenance
  - Can be used in systems up to 1,000Pa
  - IP 54 degree of protection
  - Self-adjusting after installation
- MS supply voltage 230V: Shutter with Open - Closed position. Opening angle can be adjusted using a mechanical stop such that the shutter doesn't close completely. For example, basic and demand-based ventilation can thereby be easily provided.
- MS...S supply voltage 24V AC/DC: Shutter with permanent shutter position. Shutter controlled using 2-10V signal.
- 

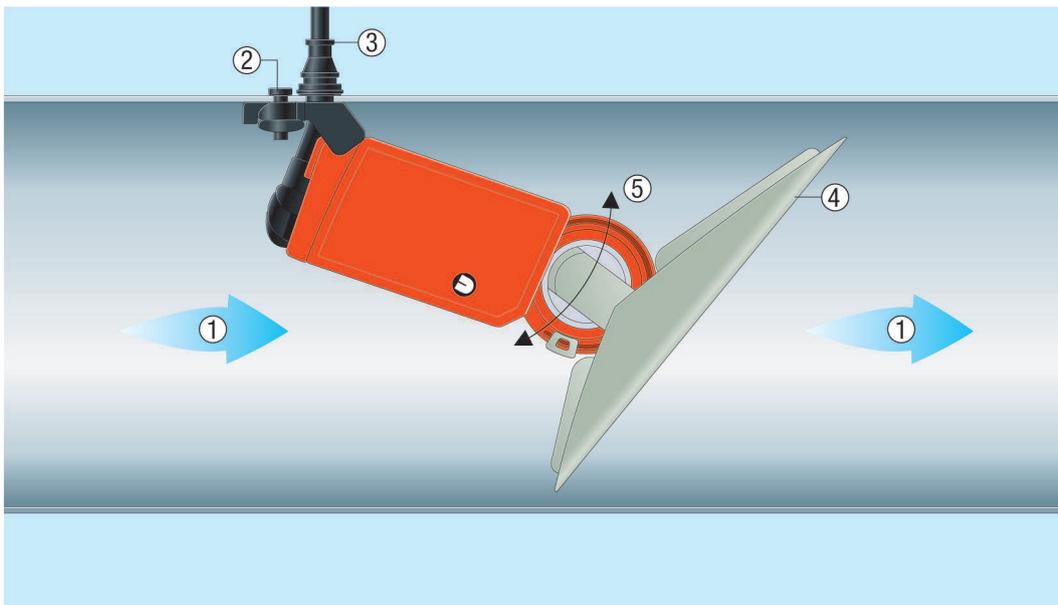

- 1 - Air direction
- 2 - Mounting
- 3 - Cable duct
- 4 - Shutter blade
- 5 - Shutter blade direction of rotation