


# INSTALLATION INSTRUCTIONS

## RS 25

### Wall-mounted fan with RS shutter and MS servomotor

For supply air fans, we would recommend combining with a RS shutter. To operate this requires a MS 2 servomotor to open and close the lamella.

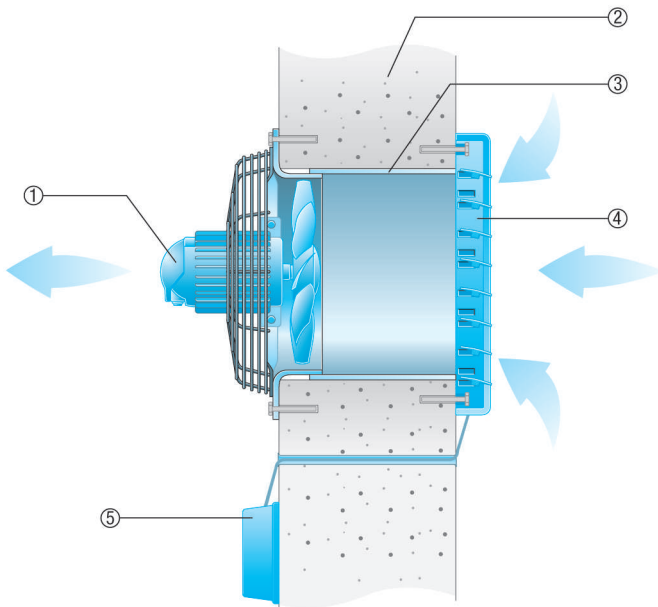

- ① EZQ/DZQ/EZS/DZS fan
- ② External wall
- ③ VH extension sleeve
- ④ RS shutter
- ⑤ MS 2 servomotor