


WIRING DIAGRAM

GRD 25

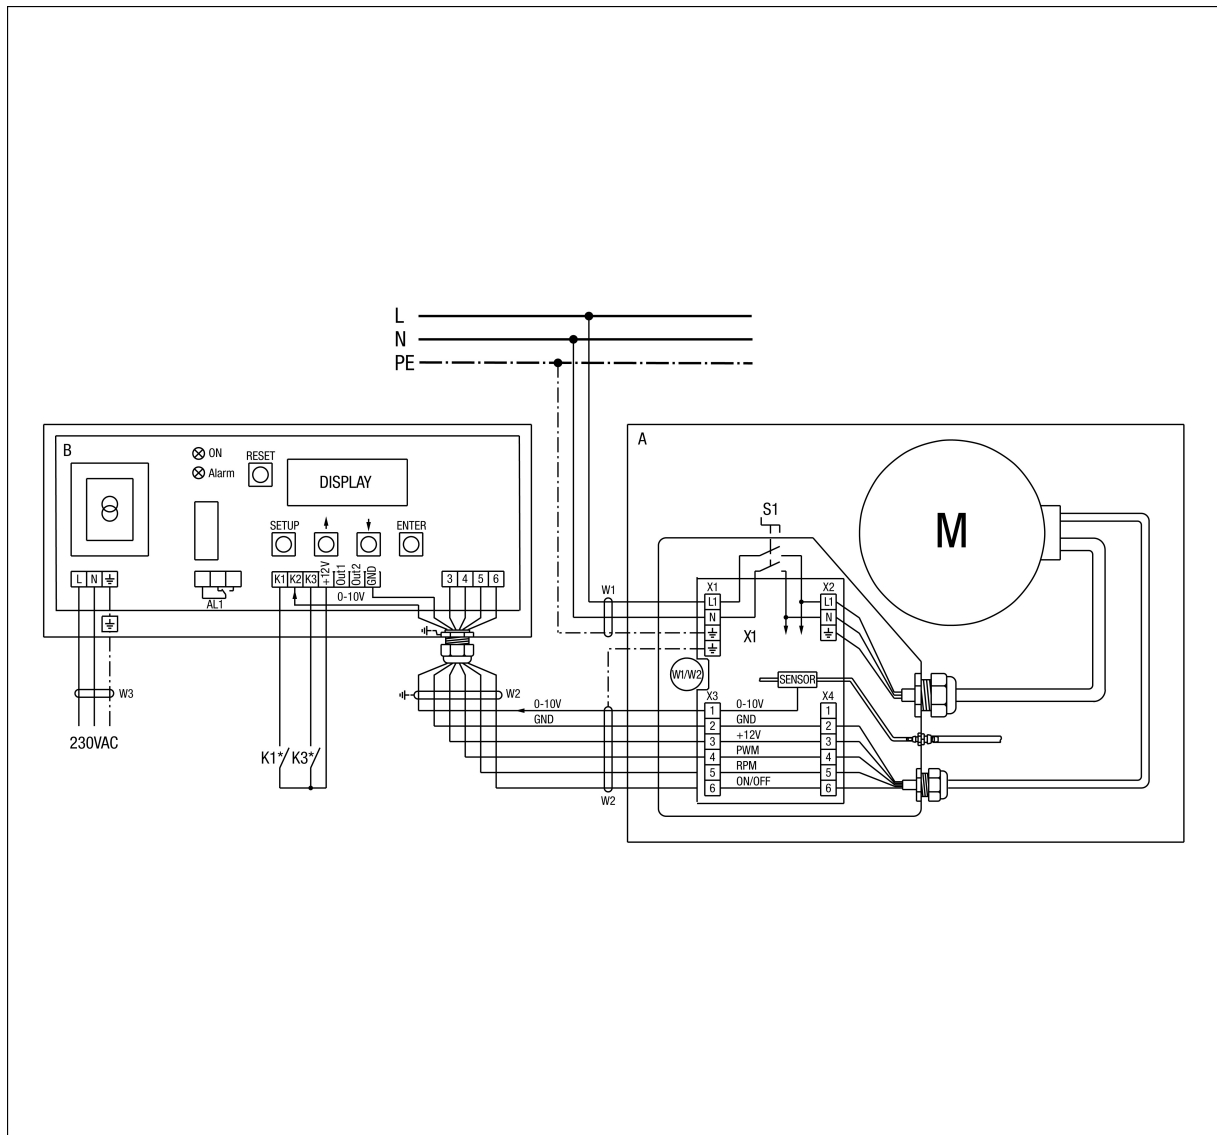

B - Control

W3 - Power cable control (provided by customer)

K1 - Closed soft start

K1 - Open soft stop

K3 - Closed reduction mode active (e.g: night-time operation)

K3 - Open reduction mode inactive

* - Attention: use K1, K3 gold-plated contacts

A - GRD unit

W1 - Power cable for GRD unit 1.5mm² (provided by customer)

W2 - Control cable with sheathing of 0.25 to 0.34mm² (provided by customer)

M - Fan motor

S1 - Service switch