

## ESR 40/1



## Kratka informacija

Zvučno izolirana ventilacijska kutija, DN 400, jednofazna struja

Broj artikla

0080.0287

## Tehnički podaci

Volumen zraka	2.500 m <sup>3</sup> /h
Brzina	1.200 1/min
S mogućnošću upravljanja brzinom	–
Nominalna snaga	585 W
I <sub>Nomin.</sub>	3 A
I <sub>Maks.</sub>	3 A
Vrsta zaštite	IP X4
Toplinska klasa	F
Težina	40,14
Težina s pakovanjem	43,12 kg
Nominalna dužina	400 mm
Širina s pakovanjem	785 mm
Visina s pakovanjem	500 mm
Dubina s pakovanjem	615 mm
Temperatura struje zraka kod I <sub>Maks.</sub>	50 °C
Jedinica za pakiranje	1 kom
Asortiman	C
GTIN (EAN)	4012799802877

## Razina jačine zvuka u opsegu buke

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Ukupno
<b>L<sub>WA2, S5</sub></b> <b>(dB(A))</b>	–	56	54	45	39	37	35	30	58
<b>L<sub>WA5, S1</sub></b> <b>(dB(A))</b>	–	46	40	32	36	34	29	19	48
<b>L<sub>WA5, S2</sub></b> <b>(dB(A))</b>	–	53	48	41	44	46	43	41	56

# ESR 40/1


	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Ukupno
<b>L<sub>WA5, S3</sub></b> (dB(A))	–	55	55	48	53	54	54	44	61
<b>L<sub>WA5, S4</sub></b> (dB(A))	–	60	60	52	58	58	58	59	66
<b>L<sub>WA5, S5</sub></b> (dB(A))	–	60	65	69	69	67	66	57	71
<b>L<sub>WA6, S1</sub></b> (dB(A))	–	42	46	50	50	47	42	28	55
<b>L<sub>WA6, S2</sub></b> (dB(A))	–	53	54	61	59	58	56	45	65
<b>L<sub>WA6, S3</sub></b> (dB(A))	–	58	62	69	68	66	66	58	74
<b>L<sub>WA6, S4</sub></b> (dB(A))	–	64	67	73	74	71	71	64	79
<b>L<sub>WA6, S5</sub></b> (dB(A))	–	70	73	76	79	76	75	69	84

L<sub>WA2</sub> = razina jačine zvuka kućišta u dB

L<sub>WA5</sub> = razina jačine zvuka slobodnog usisa u dB

L<sub>WA6</sub> = razina jačine zvuka slobodnog odsisa u dB

## Krivulja

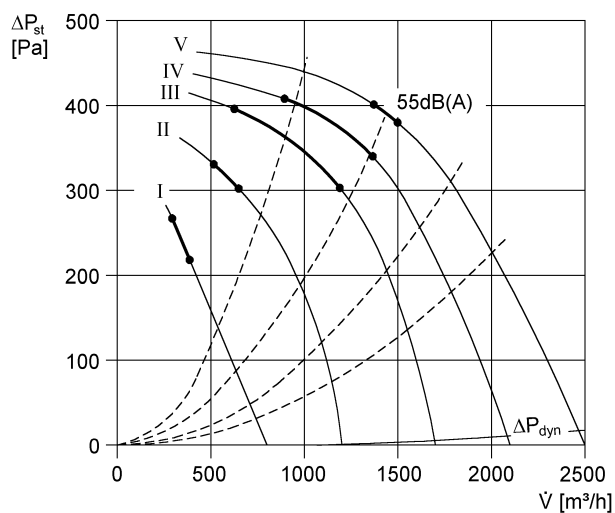

# ESR 40/1

Crtež s veličinama [mm]

