## **RSR 25**





### Short description

Tubular sound absorber with 25 mm sound absorbing cover, length: 1000 mm, DN 250

#### Application examples

Showroom, Restaurant, Theatre, Production site, Industrial building

Article number 0092.0317


#### Technical data

Model	25 mm cound chaothing cours	
	25 mm sound absorbing cover	
Material	Aluminium	
Weight	2,9 kg	
Weight including packaging	2,74 kg	
Nominal size	250 mm	
Width	312,5 mm	
Height	312,5 mm	
Depth	1.170 mm	
Width with packaging	315 mm	
Height with packaging	315 mm	
Depth with packaging	1.180 mm	
Insertion loss at 63 Hz	2 dB	
Insertion loss at 125 Hz	3 dB	
Insertion loss at 250 Hz	8 dB	
Insertion loss at 500 Hz	19 dB	
Insertion loss at 1 kHz	37 dB	
Insertion loss at 2 kHz	18 dB	
Insertion loss at 4 kHz	12 dB	
Insertion loss at 8 kHz	12 dB	
Total insertion loss		
Insertion loss note		
Sound insulation	yes	
Packing unit	1 piece	
Range	С	
GTIN (EAN)	4012799923176	

# **RSR 25**




## Characteristic curve Pressure losses



- ① Pressure loss in Pa/m sound absorber
- ② Duct diameter
- ③ Velocity of flow

## Dimensioned drawing [mm]

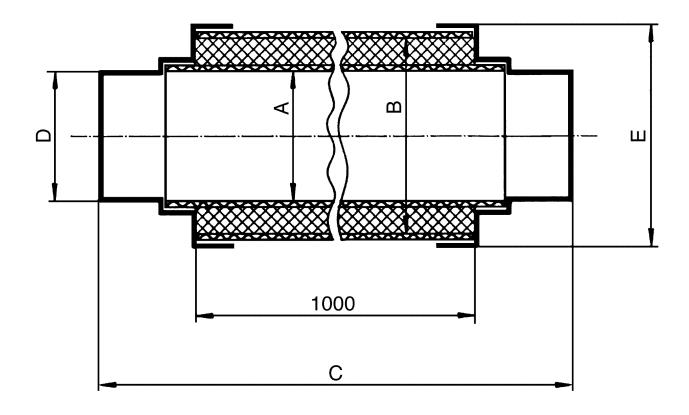

# **RSR 25**



Α	В	С	D	E
250	300	1.170	249,4	355