


DZQ 25/2 B

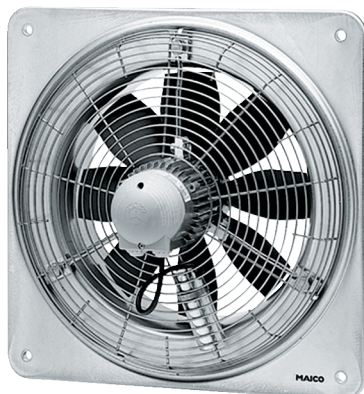

Short description

Axial wall fan with square wall plate, DN 250, three-phase AC

Application examples

Production facility, Commercial premises, Garage, Building container, Storage facility

Article number 0083.0118

Technical data

Model	Square wall plate
Air flow volume	2.120 m ³ /h
Air volume _{nom}	1.510 m ³ /h (in opt. efficiency)
Pressure p _{fs, nom}	140 Pa (in opt. efficiency)
Rotating speed n _{nom}	2.870 1/min (in opt. efficiency)
Impeller type	axial
Speed controllable	✓
Reversing capacity	✓
Type of voltage	Three-phase AC
Rated voltage	400 V
Frequency	50 Hz
Nominal output	175 W (in opt. efficiency)
I _{nom}	0,35 A (in opt. efficiency)
I _{max}	0,45 A
Degree of protection	IP 55
Insulation class	B
Pole-changeable	–
Mains cable	7 x 1,5 mm ²
Installation site	Wall / Ceiling
Type of installation	Surface-mounted
Installation position	horizontal / vertical
Material	Sheet steel, galvanised
Colour	Silver
Weight	7,11 kg
Weight including packaging	8,08 kg
Nominal size	250 mm
Width	400 mm
Height	400 mm
Depth	259 mm

DZQ 25/2 B

Width with packaging	420 mm
Height with packaging	420 mm
Depth with packaging	300 mm
Airstream temperature at nominal current	-20 °C up to 60 °C
Airstream temperature at I_{Max}	-20 °C up to 60 °C
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799831181

Technical data according to ErP in Best Efficiency Point (BEP)

Total efficiency η	33,6 %
Measurement category	A
Efficiency category	static
Efficiency level N	44,7
VSD necessary	No
Year of manufacture	see rating plate
Manufacturer's name / official registration number / manufacturer's place of establishment	Maico Elektroapparate-Fabrik GmbH / Freiburg registration court, HRB 601233 / Villingen-Schwenningen
Art. No.	0083.0118
P_{BEP} / Air volume $_{BEP}$ / $P_{fs, BEP}$	0,175 kW / 1.510 m ³ /h / 140 Pa
n_{BEP}	2.870 1/min
Specific ratio	≈ 1
Information about dismantling and disposal	see mounting instructions
Information about installation, operation and repairs	see mounting instructions
Objects used to measure efficiency which are not described by the measurement category	-
Sound power level $_{L_{WA7}}$	81 dB(A)

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
$L_{WA7, S1}$ (dB(A))	26	35	52	60	59	60	56	46	65
$L_{WA7, S2}$ (dB(A))	30	41	63	63	68	69	66	56	73
$L_{WA7, S3}$ (dB(A))	35	44	65	67	72	71	69	60	77
$L_{WA7, S4}$ (dB(A))	34	47	58	73	75	75	71	63	80
$L_{WA7, S5}$ (dB(A))	36	46	56	74	76	76	72	64	81
$L_{WA8, S1}$ (dB(A))	36	42	53	58	64	65	66	63	71


DZQ 25/2 B

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA8, S2} (dB(A))	50	55	63	63	71	72	72	69	77
L_{WA8, S3} (dB(A))	51	57	66	66	73	74	74	70	79
L_{WA8, S4} (dB(A))	54	61	65	74	76	76	76	73	82
L_{WA8, S5} (dB(A))	55	59	62	75	77	78	78	74	84

L_{WA7}= housing and free inlet sound power level in dB.

L_{WA8}= housing and free outlet sound power level in dB.

Characteristic curve

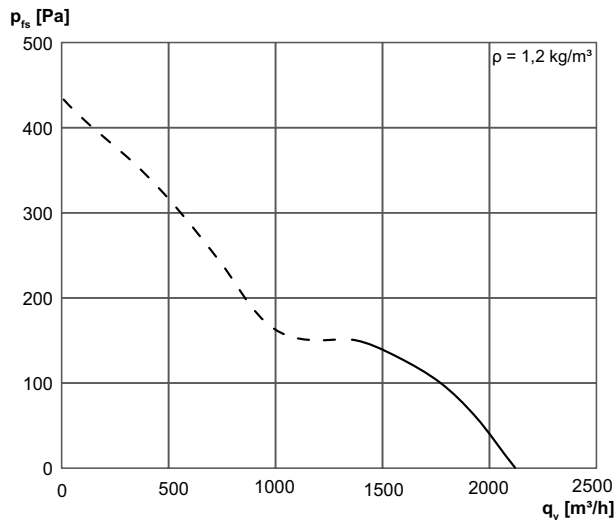

Dimensioned drawing [mm]

- ① Steel wall plate = EZQ/DZQ model
- ② Steel wall ring = EZS/DZS model

