


RSR 20

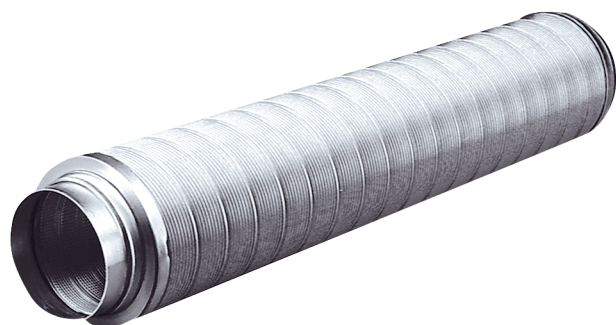

Short description

Tubular sound absorber with 25 mm sound absorbing cover, length: 1000 mm, DN 200

Application examples

Showroom, Restaurant, Theatre, Production site, Industrial building


Article number 0092.0316

Technical data

Model	25 mm sound absorbing cover
Material	Aluminium
Weight	2,4 kg
Weight including packaging	2,2 kg
Nominal size	200 mm
Width	262,5 mm
Height	262,5 mm
Depth	1.120 mm
Width with packaging	270 mm
Height with packaging	270 mm
Depth with packaging	1.190 mm
Insertion loss at 63 Hz	3 dB
Insertion loss at 125 Hz	3 dB
Insertion loss at 250 Hz	9 dB
Insertion loss at 500 Hz	21 dB
Insertion loss at 1 kHz	40 dB
Insertion loss at 2 kHz	23 dB
Insertion loss at 4 kHz	15 dB
Insertion loss at 8 kHz	13 dB
Total insertion loss	
Insertion loss note	
Sound insulation	yes
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799923169


RSR 20

Characteristic curve Pressure losses

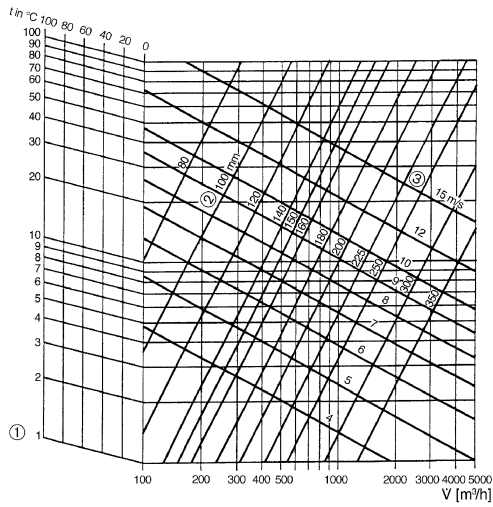

- ① Pressure loss in Pa/m sound absorber
- ② Duct diameter
- ③ Velocity of flow

Dimensioned drawing [mm]

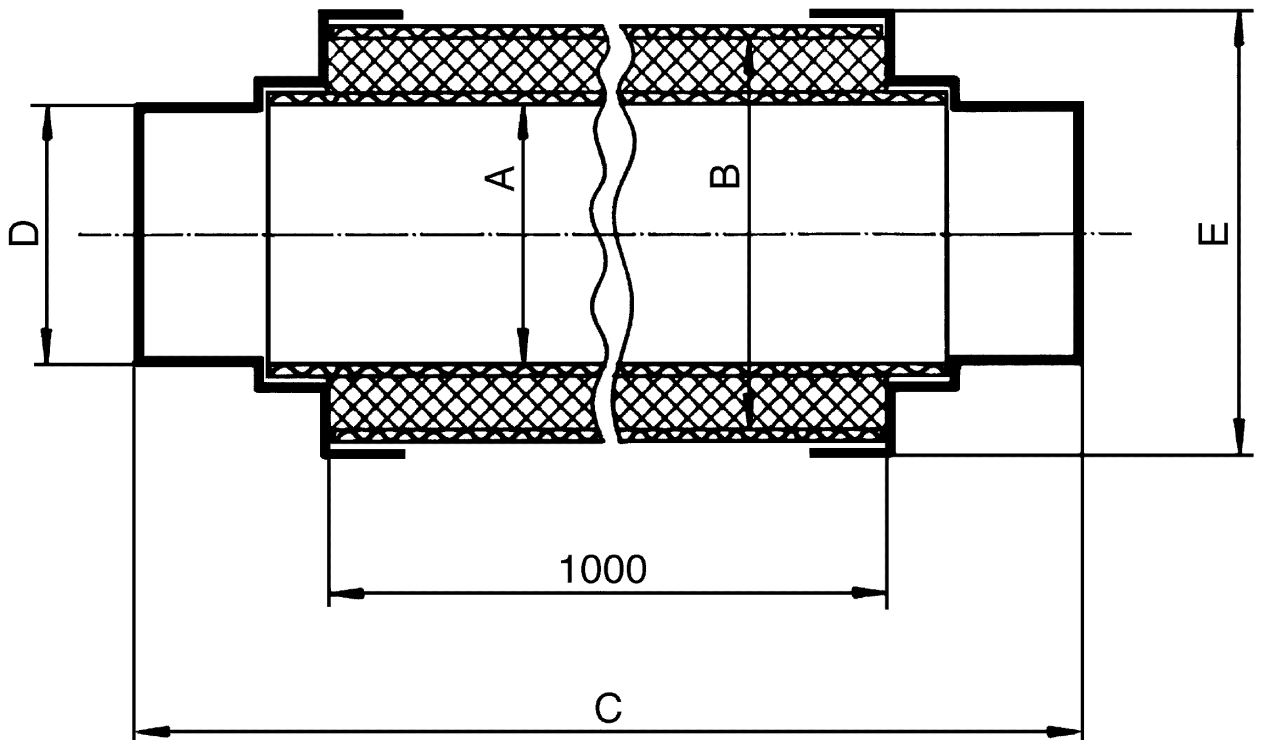



RSR 20

A	B	C	D	E
200	250	1.120	199,5	300